










CERTIFIED

With over 40 years of rope-making experience, Pelican Rope offers high-quality and groundbreaking ropes, lanyards, and rope assemblies. When you demand the ultimate in high-performance climbing gear, U.S. Rigging's ProClimb® line delivers unsurpassed quality. Together, we offer a comprehensive line of arborist gear with unmatched quality and



#### VISIT US AT WWW.PELICANROPE.COM

#### BRANDS CONTACT INFO

#### Pelican Rope 🚜 U.S. RIGGING A ProClimb Corporate Office:

1600 E. McFadden Ave. Santa Ana, CA 92705

Get in Touch:

Phone: (866) 490-7444 Fax: (714) 545-3311

Hours:

8:00 am - 5:00 pm Mon-Fri (PST)





**AFFILIATIONS** 







#### The products displayed in this catalog are intented for professional use only.

Tree care, especially while performed elevated above ground level is inherently dangerous, and can lead to serious injury or death. Neither Pelican Rope nor U.S. Rigging Supply are responsible for accidents that may occur resulting from the use or misuse of any product.

All rope, rope assemblies, and hardware intended for work positioning, climbing, or fall protection must be inspected daily by the climber and used only for his or her personal safety. Rigging products must never be used for climbing or work-positioning.

The equipment in this catalog is provided with the consideration that the user is highly knowledgeable with the application and proper use of said equipment. Written content expressed in this catalog are designed to advertise the products offered; they are not intended as instructions or as replacements for actual training. Proper training and instruction on the use of the items purchased from this catalog are the sole responsibility of the user.

### DIRECTORY

ROPE

CLIMBING RIGGING

ROPE ASSEMBLIES

SPLIT TAILS

FLIP LINES

LANYARDS

SLINGS

**SAVERS** 

**HARDWARE** 

DESCENDERS

**ASCENDERS** 

**ROPE ADJUSTERS** 

**SWIVELS** 

STEEL SNAPHOOKS

ALUMINUM SNAPHOOKS

**ROPE FASTENERS** 

STEEL CARABINERS

ALUMINUM CARABINERS

RIGGING RINGS

**PULLEYS** 

TERMINATION PLATE

FIDDLE BLOCKS

TREE CARE

TREE SUPPORT SYSTEMS

**ATTACHMENTS** 

QUICK LINKS

CHAFE GUARD SHRINK TUBING ACCESSORIES

THIMBLES & SHACKLES

**ADD-ONS & EXTRAS** 





































4

			M				ın	Riggir		sp			Kohe G	JIUE \
			ping	bu	MRS / DdRT	SRT	Canopy Access	Natural Crotch Riggir	Footlocking	Accessory Cords	Splicing			
Product Name	Product Name	Page	Climbing	Rigging	MRS	SRS/SRT	Cano	Natu	Foot	Acce	Easy	Construction	Cover	Core
Arborist-16™	4AR-16	8	▼		▼			$\nabla$			$\nabla$	16 Strand	Polyester	Nylon
Arborist-24™	4AR-14Y	9	abla		$\overline{\mathbf{V}}$				$\overline{\nabla}$			24 Strand	Polyester	Nylon
Tree Viper™	4A-15LY15	11	$\nabla$		$\nabla$				abla			24 Strand	Polyester	Nylon
Static Master™	2WP	12	$\overline{\nabla}$			$\overline{\mathbf{A}}$	$\overline{\nabla}$					Static Kernmantle	Polyester	Nylon
Static Master II™	2WP2	12	$\nabla$			$\overline{\nabla}$	$\nabla$					Static Kernmantle	Polyester	Nylon
Static Master Pro™	1WPP	12	$\nabla$			$\overline{\mathbf{V}}$	$\overline{\nabla}$					Static Kernmantle	Polyester	Polyester
FireShield-T™	2TT / 2TP	14	$\nabla$			$\overline{\mathbf{V}}$	$\overline{\mathbf{V}}$		abla	$\nabla$		Static Kernmantle	Technora <sup>®</sup>	Technora® or Polyester
FireShield -K™	2KK	15	$\nabla$			$\overline{\mathbf{V}}$						Static Kernmantle	Kevlar AP®	Kevlar AP®
Escape Pro™	2WP	16	abla			$\overline{\mathbf{A}}$	$\overline{\mathbf{A}}$					Static Kernmantle	Polyester	Nylon
Rescue Light™	2WD	17	abla			$\overline{\mathbf{A}}$						Static Kernmantle	Polyester	Dyneema®
Canyon Light™	2WD	17	$\nabla$			$\nabla$						Static Kernmantle	Poly-Technora®	Dyneema®
Technora® Prusik Line	1S-T	18	$\nabla$			$\nabla$				V		Kernmantle	Technora®	Nylon
Accessory Cord	15	19	$\nabla$			$\nabla$	$\nabla$			$\nabla$		Kernmantle	Polyester	Nylon
Sling Tech 12™	7PE2	21		$\nabla$				$\nabla$			$\nabla$	12 Strand	Polyester	10/11/
Matador™ Bull Rope	4BR	22		$\nabla$	$\nabla$	$\nabla$					$\nabla$	Double Braid	Polyester	Nylon
The Ape™	1AP	23		$\overline{\nabla}$	$\nabla$	$\overline{\mathbf{V}}$			abla		$\nabla$	Double Braid	Polyester	Polyester
Rig Master™	PD	25		$\nabla$								3 Strand	Polyester	Polypropylene
3 Stand Nylon	NY	26		$\nabla$				$\nabla$				3 Strand	Nylon	100
3 Strand Polyester	PE	27		$\nabla$				$\nabla$				3 Strand	Polyester	. 1
Load Pro™	1AP	28		$\nabla$	$\nabla$	$\overline{\mathbf{V}}$			abla		$\nabla$	Double Braid	Polyester	Polyester
Composite Load Pro™	4N	29		$\overline{\nabla}$	$\nabla$	$\overline{\nabla}$					$\nabla$	Double Braid	Polyester	Nylon
S-12 Synthetic Stainless Rope™	75	30		$\nabla$							$\nabla$	12 Strand	Spectra <sup>®</sup>	
D-12™	7D	32		$\nabla$							$\nabla$	12 Strand	Dyneema®	. 100
P-12™	7PE	33		$\nabla$				abla			$\nabla$	12 Strand	Polyester	



**Abrasion Resistance -** The capacity of a fiber or cordage to resist erosion and breaking due to friction against other fibers or rope components or a contact surface which can be a piece of the rope itself.

**Construction -** The way in which the fibers of the rope are formed, twisted, intertwined, or braided together. Popular constructions include: static kernmantle, double braid, solid braid, and hollow braid.

**Core** - An important component of rope that can be constructed of either fiber or wire. The purpose of the core is to reinforce the outer strands, or cover, and to prevent them from bearing down against one another.

**Cover -** The outermost layer of synthetic fibers used to construct the basis of a rope.

**Creep -** The length or rate at which the synthetic fibers in the rope elongate irrevocably over a period of time.

**Minimum Breaking Strength (MBS) -** The lowest acceptable load that would be expected to break or split a single fiber strand in a tensile test conducted under a specified procedure for a specific rope product.

**Spliced** - The fusing of two ends of rope strand or cordage by interweaving or inserting these ends into the body of a product.

**Torque -** The twisting force that synthetic rope or cordage exerts when tensioned. Key components of a rope's torque characteristics are the number of strands and lay direction.

Done Guide

www.pelicanrope.com 1.866.490.7444



ARBORIST-24™

# **ARBORIST-16™**



À.	483				
· 7	<b>2</b> 7	Ø	TENSILE STRENGTH	WT. / 100FT	
X	SKU	IN	LB	LB	3
	4AR-16	1/2	7,150	8.4	

### **More Color Options:**



White







Orange









Tiger Line

Available in 120', 150' & 200' hanks.

### Family Code: 4AR-16

### 16 Strand Arborist Rope

This high-strength composite climbing rope features a tough 16 strand braided chemical resistant polyester cover over a non-rotational nylon parallel core. This construction results in a smooth running rope ensuring fewer snags and minimal abrasion. Its 16 strand weave is steam set which helps to eliminate cover over core slippage.

#### Benefits & Features

- ▼ Full 1/2" Diameter
- **▼** Firm Construction
- ▼ High Visibility
- ▼ Low-Stretch
- ▼ Flexible

**CONSTRUCTION:** 16 Strand **COVER**: Polyester

CORE: Nylon

### **Eye Options:**







Spliced Eye







Tight Spliced Eye (TSE)

#### Family Code: 4AR-14Y


### 24 Strand Arborist Rope

This double-ply braid features a tough chemical resistant polyester cover over a strong nylon core. Pelican's 24 strand braided cover is smooth running over sheaves.



### Benefits & Features

- ▼ Smooth Running Through Gear
- ▼ Smooth to the Touch
- ▼ Lightweight



**CONSTRUCTION**: 24 Strand **COVER:** Polyester **CORE**: Nylon

### **Eye Options:**



Sewn Eye (SNE)



Spliced Eye (SE)



Tight Sewn Eye (TSNE)



Tight Spliced Eye (TSE)

ROPE CLIMBING ROPE | CLIMBING





Family Code: 4A-15LY15

### 24 Strand Climbing Rope

The Tree Viper™ is a unique hand-spliced 24 strand rescue rope. This rope looks great, and provides easy knotability and zero milking. The bright colors of the rope ensure excellent visibility.

The incredibly strong cover of this climbing rope runs smoothly over sheaves, providing reduced drag through gears for faster ascending and finer control while descending. The nylon core holds better and stronger knots, due to its stretch and texture.

The double-ply braid features abrasion and chemical resistant polyester cover over a strong nylon. The polyester cover provides excellent UV protection, high abrasion resistance, and unmatched durability.

#### Benefits & Features

- ▼ Designed for Rigorous Climbing
- ▼ Abrasion & Chemical Resistant
- ▼ Exceptional Feel in Climbing
- Reduces Hand Cramping
- ▼ Smooth but Tough Cover
- ▼ Zero Milking

**CONSTRUCTION**: 24 Strand **COVER**: Polyester

CORE: Nylon



<b>√</b>	7	Ø	TENSILE STRENGTH	WT. / 100FT	73
72°	SKU	MM	LB	LB	3
	4A-15LY15	11.8	6,300	6.7	

### **Eye Options:**



Sewn Eye (SNE)



Spliced Eye (SE)



Tight Sewn Eye (TSNE)



Tight Spliced Eye (TSE)

Available in 120', 150' & 200' hanks.

www.pelicanrope.com

HIS GERA

#### STATIC MASTER™ Family Code: 2WP

**Eye Options:** 

Sewn Eye (SNE)

www.pelicanrope.com

**CONSTRUCTION**: Static Kernmantle

**COVER**: Polyester

**CORE**: Nylon

#### Benefits & Features

**▼** Withstands Rugged Outdoor Conditions

▼ Excellent Grip Feature

▼ Low-Stretch

Pelican Rope's static kernmantle features a tough, chemical resistant polyester cover over a non-rotational, parallel nylon core; making it ideal for rappelling and safety/ rescue

SKU	Ø	MBS	WT. / 100FT	NFPA	ANSI
2WP-12	3/8 in	6,214 lb	4.6 lb	Technical	
2WP-14	7/16 in	7,652 lb	5.7 lb	Technical	
2WP-16	1/2 in	9,901 lb	7.5 lb	General	•
2WP-20	5/8 in	11,046 lb	10.8 lb	General	•

### More Color Options:



Black



White







### Family Code: 2WP2

#### **Benefits & Features**

- Reduced Drag for Faster Ascent
- ▼ Descending with Fine Control
- ▼ Unique, Two Strand Design
- ▼ Smooth Rolling in Pulleys

**CONSTRUCTION**: Static Kernmantle

**COVER**: Polyester CORE: Nylon







# STATIC MASTER IIM

The Static Master II is made with a unique 32 strand construction giving it more flexibility than the original Static Master™. We use a two-twill pattern on our braided strands to provide a silk-like running sheath. This incredibly smooth rope cover provides reduced drag through gears for faster ascending and finer control while descending.

SKU	Ø	MBS	COLOR	WT. / 100FT	NFPA	ANSI
2WP2-14	7/16 in	7,017 lb	Blue	6.0 lb	Technical	
2WP2-16	1/2 in	9,809 lb	Red	8.0 lb	General	

### **Eye Options:**

**More Color Options:** 



Sewn Eye (SNE)



#### Family Code: 1WPP

### Benefits & Features

Withstands Rugged Outdoor Conditions

▼ Extremely Low-Stretch

▼ High-Flexibility

▼ High-Strength

**CONSTRUCTION:** Static Kernmantle

**COVER**: Polyester **CORE**: Polyester

### **Eye Options:**









# STATIC MASTER PRO™

Our new Static Master Pro is a static kernmantle rope with a polyester core and cover. Because of its 100% polyester composition, this rope is very low-stretch yet high-strength. It is also very flexible; smoothly passing over pulleys and sheaves.

<u> </u>	SKU	Ø	MBS	WT. / 100FT
	1WPP-14	7/16 in	6,600 lb	6.0 lb
	1WPP-16	1/2 in	9,160 lb	8.0 lb

### More Color Options:



Red



Orange





Blue

White





ROPE | CLIMBING

ROPE | CLIMBING

15

# FIRESHIELD-T™



_	Allega	A STATE OF THE PARTY OF THE PAR	69/		
F,	<b>*</b> 7	Ø	MBS	WT. / 100FT	
	SKU	MM	LB	LB	CORE
	2TT-7.5T	7.5	6,345	2.8	Technora®
	2TP-7.5T	7.5	4,282	2.7	Polyester



Family Code: 2TT / 2TP

### Technora® Fire Escape Rope

Our 100% Technora® escape rope is one of the most heat-resistant ropes on the market, making it optimal for search and rescue operations. The FireShield-T has a static kernmantle construction and resists heat up to 930° F with a loss of strength at 500° F. This high-strength, low-stretch rope is UL and NFPA 1983-2017 certified as well as a top choice for fire fighters and rescue workers.

### Benefits & Features

- ▼ Flexible & Supple for Compact Storage
- $\overline{V}$  Works with Descending Devices
- ▼ Great Abrasion Resistance
- **▼** Extremely Durable

**CONSTRUCTION**: Static Kernmantle

**COVER:** Technora®

CORE: Technora® or Polyester

### **Eye Options:**



Sewn Eye (SNE)





#### Family Code: 2KK

### Kevlar AP® Fire Escape Rope

This 100% Kevlar AP® rope is similar to the Technora® Fire Escape rope. The FireSheild-K is heat resistant up to 930° F with a loss of strength at 500° F. It's also UL and NFPA 1983-2017 certified which meet vital requirements for safety operations.

# Benefits & Features

- **▼** Works Well with Descent Devices
- ▼ Good Abrasion Resistance
- ▼ Lightweight
- **▼** Flexible

**CONSTRUCTION**: Static Kernmantle

**COVER:** Kevlar AP® CORE: Kevlar AP®


### Eye Options:




Sewn Eye (SNE)



## FIRESHIELD-K™



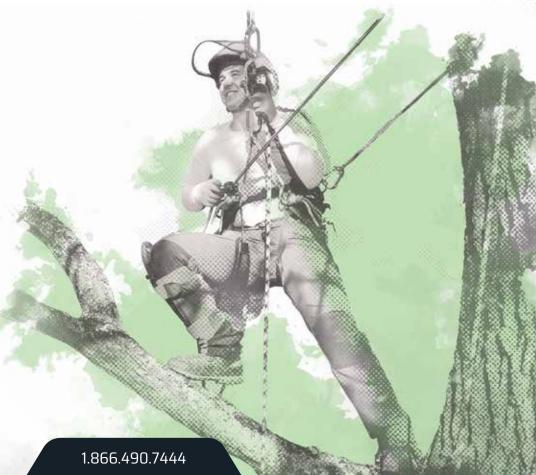



# ESCAPE PRO™



	Alexander of the second	No.			
79	<b>2</b> 7	Ø	MBS	WT. / 100FT	7
	SKU	MM	LB	LB	3
	2WP24-7.50	7.5	4,463	2.7	



Family Code: 2WP24

### Personal Escape Rope

Pelican's personal escape rope is formed with a durable kernmantle construction that is produced with a strong polyester cover over shock absorbing nylon core. Although ideal for rescue operations, its smaller diameter and high tensile strength is ideal for individual use. This escape rope is UL and NFPA 1983-2017 certified.

#### Benefits & Features

- **▼** Works Well with Descent Devices
- ▼ Folds Well into Packs
- ▼ Smooth Cover
- ▼ Low-Stretch

**CONSTRUCTION**: Static Kernmantle **COVER**: Polyester CORE: Nylon

### **Eye Options:**



Sewn Eye (SNE)





Family Code: 2WD

#### Benefits & Features

▼ High-Strength

▼ 200 ft only 5 lb

▼ Lightweight

**CONSTRUCTION**: Static Kernmantle

**COVER**: Polyester CORE: Dyneema®

#### **Eye Options:**



Sewn Eye (SNE)

# **RESCUE LIGHT™**



#### Dyneema® Climbing Rope

Originally developed for mountain rescue teams and canyoneering, Pelican's Dyneema® low angle rescue rope ensures superior strength and dependability in the most adverse conditions. The highly visible orange and yellow polyester cover provides excellent abrasion resistance, while its Dyneema® core provides superior tensile strength and is extremely lightweight.

	Allen				
<b>T</b>	7	Ø	TS	WT. / 100FT	3
2	SKU	MM	LB	LB	<b>#</b> 000
	2WD-105	5/16"	5,400 lb	2.52 lb	

Family Code: 2WD

### **Benefits & Features**

▼ Good Abrasion Resistance

▼ Smooth Cover

▼ Low-Stretch

▼ Lightweight

**CONSTRUCTION**: Static Kernmantle

COVER: Poly-Technora® CORE: Dyneema®

### **Eye Options:**



Sewn Eye (SNE)

## **CANYON LIGHT™**



Built tough for canyoneering, our versatile Canyon Light™ is designed for rigorous and abrasive conditions. Constructed with a Poly-Technora® cover and Dyneema® core, this canyoneering rope offers a thicker, tougher sheath and tighter weave than climbing ropes. Its low-stretch, static nature delivers increased control while descending.

400	Alexander		SHEET THE STATE OF		79
7	<b>2</b> 7	Ø	TS	WT. / 100FT	
3	SKU	MM	LB	LB	
	2WD-10TL	8 mm	4,000 lb	2.95 lb	

### Family Code: 15

# ACCESSORY CORD



This Technora® over nylon core rope is the original high-strength, nonmelting prusik line. Technora® is eight times stronger than steel and highly resistant to heat, acids, alkalis and organic solvents and is also not vulnerable to damage caused by steam or sea water.

### Kernmantle Utility Cord

This versatile kernmantle composite rope has a shock absorbent nylon core and an abrasion resistant polyester cover. This cover and core combo is rugged yet soft enough to provide excellent holding power when tying prusik knots.



#### TENSILE STRENGTH WT. / 100FT IN LB LB 15-08T 1/4 2,900 2.2 11/32 6,000 3.8 1S-11T

### Benefits & Features

- ▼ Long-Lasting Prusik
- ▼ Abrasion Resistant
- ▼ Heat Resistant

**CONSTRUCTION**: Kernmantle COVER: Technora®

CORE: Nylon

#### **Benefits & Features**

- ▼ Excellent Knot-Holding Power
- **▼** Long-Lasting
- ▼ Good Grip
- **▼** Flexible

**CONSTRUCTION**: Kernmantle

**COVER:** Polyester CORE: Nylon

	Alexander	THE REAL PROPERTY.			
<b>2</b> 7		Ø	TENSILE STRENGTH	WT. / 100FT	
<b>3</b>	SKU	IN	LB	LB	3
	15-08	1/4	2,950	2.3	
	15-10	5/16	3,700	3.1	

### **Eye Options:**



Sewn Eye (SNE)

www.pelicanrope.com

### More Color Options:



Olive





Tan



**Eye Options:** 



Black



# 12 Strand Single Braid

Family Code: 7PE2

The Sling Tech 12 is a 12 strand rope built to provide optimal performance in sling applications. This rope design conforms to the surface of objects being lifted for optimum grip. Our Pelican Tuff™ polyurethane coating enhances abrasion resistance.



### Benefits & Features

- **▼** Pelican Tuff<sup>™</sup> Urethane Coated
- $\overline{V}$  Stronger than Double Braid
- **▼** Easy to Splice
- ▼ Good Grip
- ▼ Low-Stretch

**CONSTRUCTION**: 12 Strand **COVER:** Polyester

A STATE OF THE PARTY OF THE PAR	THE REAL PROPERTY.		
7 SKU	Ø	TENSILE STRENGTH	COLOR
7PE2-08C8	IN 1/4	LB 3,200	Gray
7PE2-120C5	3/8	7,000	Orange
7PE2-160CY	1/2	12,000	Yellow
7PE2-200C1	5/8	20,000	Blue
7PE2-240C3	3/4	26,000	Green
7PE2-280C2	7/8	36,000	Red

## Color-Coded by Diameter:







Green






Eye Options:



Blue





Yellow







ROPE RIGGING



#### Family Code: 4BR



### **Arborist Bull Rope**

By combining a polyester cover over a nylon core, we've created a high force rope that offers dependability and unsurpassed resistance to abrasion, sunlight and common chemicals. The Matador™ Bull Rope provides shock absorption properties similar to nylon along with a tough polyester cover. Our Pelican Tuff™ urethane coating provides an additional UV protection and increased abrasion resistance.

### **Benefits & Features**

- **Abrasion Resistant**
- ▼ Shock Absorbent
- ▼ Even Balance
- **▼** Spliceable

**CONSTRUCTION**: Double Braid

**COVER:** Polyester CORE: Nylon

### Color-Coded by Diameter:





Orange

Green



# MATADOR™ BULL ROPE



		A SHALL SHAL		
<b>2</b> 7	Ø	TENSILE STRENGTH	WT. / 100FT	
SKU	IN	LB	LB	COLOR
4BR-16C3	1/2	10,000	7.7	Green
4BR-18C1	9/16	12,200	9.6	Blue
4BR-20C5	5/8	16,000	13.1	Orange
4BR-24CY	3/4	25,000	17.2	Yellow
4BR-32C2	1	45,000	30.9	Red

### **Eye Options:**





24 ROPE | RIGGING

ROPE | RIGGING

## 25

# LOAD PRO™

75	<b>2</b> 7	Ø	TENSILE STRENGTH
1	SKU	IN	LB
	1AP-120	3/8	5,000
	1AP-140	7/16	7,500
	1AP-160	1/2	11,000
	1AP-180	9/16	14,000
	1AP-200	5/8	17,000
	1AP-240	3/4	21,000
	1AP-280	7/8	30,000
	1AP-320	1	40,000
	1AP-360	1-1/8	48,000
	1AP-400	1-1/4	57,000
	1AP-480	1-1/2	75,000
	1AP-560	1-3/4	104,000
	1AP-640	2	125,000
	1AP-720	2-1/4	164,000
	1AP-800	2-1/2	188,000

Family Code: 1AP

### The #1 Load Rope in the U.S.A.

Designed for use in cable pulling, this highly versatile rope combines low-stretch with high-strength. This load line also offers dependability and unsurpassed resistance to abrasion, sunlight and common chemicals. It has a melting point between 489-500° F and a loss of strength between 244-250° F.

Our optional Pelican Tuff™ urethane coating penetrates the fibers of the outer cover providing additional protection to the inner core while increasing abrasion resistance.

#### Benefits & Features

- ▼ Balanced Core & Cover Design
- ▼ Abrasion Resistant
- **▼** High-Strength
- ▼ Torque-Free
- ▼ Chafe Guard
- ▼ Low-Stretch

**CONSTRUCTION:** Double Braid

COVER: Polyester CORE: Polyester

#### **Eue Options:**



Spliced Eye (SE)

Spools include a 6" eye splice each end with chafe guard.
Pelican Tuff™ urethane coating available upon request.

#### Family Code: 4N

### High-Force Cable Pulling Rope

With shock absorption properties and a higher tensile strength than both nylon and polyester, this versatile rope offers unmatched dependability. This high-performance, high-force cable pulling rope provides even-balance and unsurpassed quality and performance.

Our optional Pelican Tuff<sup>™</sup> urethane coating penetrates the fiber of the outer cover - providing additional protection of the inner core while increasing abrasion resistance.

#### Benefits & Features

- **▼** High-Strength Composite
- ▼ Abrasion Resistant
- ▼ Shock Absorbent
- ▼ Even Balance
- **▼** Long-Lasting

**CONSTRUCTION**: Double Braid

COVER: Polyester CORE: Nylon

### **Eye Options:**



Spliced Eye (SE)

Spools include a 6" eye splice each end with chafe guard.
Pelican Tuff™ urethane coating available upon request.

# COMPOSITE LOAD PRO™










27

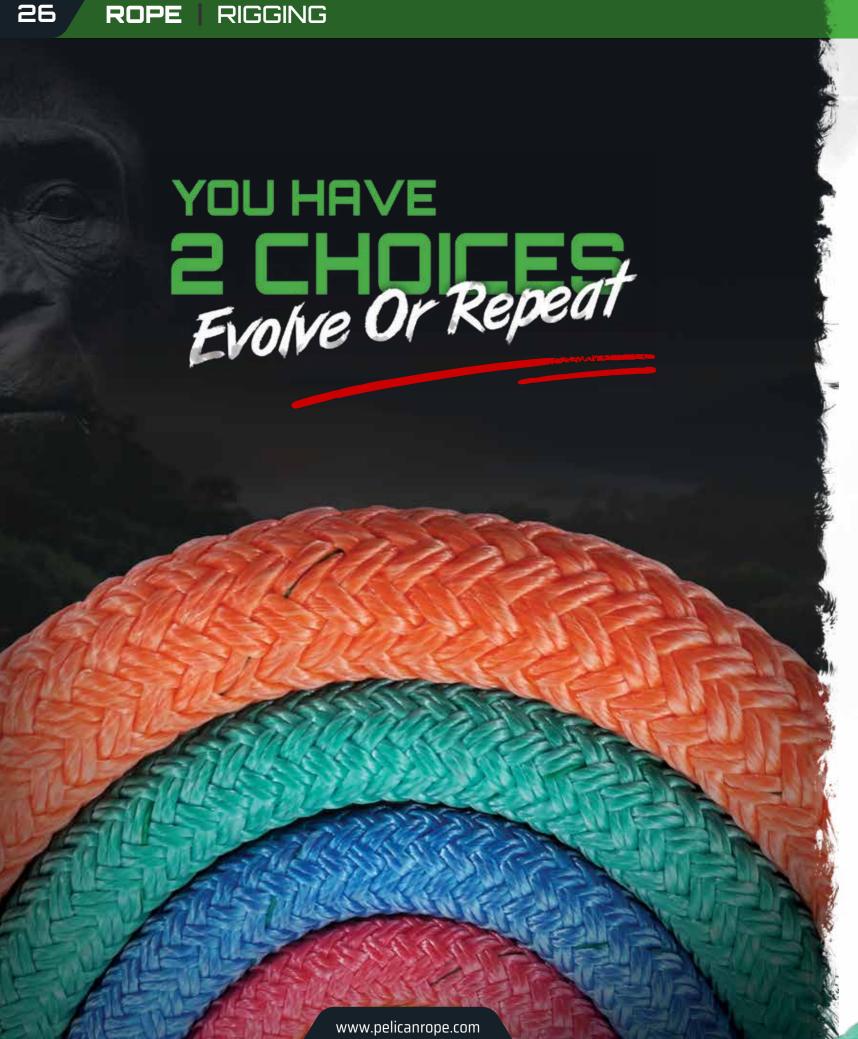

Family Code: 1AP



### Tree Rigging Rope

The Ape rope is a low-stretch, highstrength, double braid line with a 100 percent polyester cover and core.

The rope's Pelican Tuff™ urethane coating penetrates the fibers of the outer cover - providing additional protection to the inner core while increasing abrasion resistance.

#### Benefits & Features

- ▼ Balanced Core & Cover Design
- ▼ Abrasion Resistant
- **▼** High-Strength
- ▼ Torque-Free
- ▼ Low-Stretch

**CONSTRUCTION**: Double Braid

**COVER**: Polyester **CORE**: Polyester

### Color-Coded by Diameter:



Spliced Eye (SE)





			THE RESERVE		
Á	<b>3</b> 7	Ø	\$ 1955 BM	TENSILE STRENGTH	WT. / 100FT
32	SKU	IN	COLOR	LB	LB
	1AP-16CY	1/2	Yellow	11,000	9.2
	1AP-18C2	9/16	Red	14,000	10.5
	1AP-20C1	5/8	Blue	17,000	13.7
	1AP-24C3	3/4	Green	21,000	18.2
	1AP-32C5	1	Orange	40,000	35.5

### **Color Options:**





Orange





Yellow

Green



			-
7	7	Ø	
72	SKU	IN	3
	NY*080	1/4	
	NY*100	5/16	
	NY*120	3/8	
	NY*160	1/2	
	NY*200	5/8	
	NY*240	3/4	
	NY*320	1	



Family Code: NY

### Nylon 3 Strand Twist Rope

Pelican's 3 strand nylon cord is an effective, all-purpose shock absorbent rope. Its high-strength and elasticity are recommended for securing boats and cargo. This 3 strand is resistant to abrasion, sunlight, rot, mildew and many common chemicals.

#### Benefits & Features

- **▼** Great Abrasion Resistance
- ▼ Rot and Mildew Resistant
- ▼ Excellent Strength
- ▼ Shock Absorbent
- ▼ Economical

CONSTRUCTION: 3 Strand COVER: Nylon

### **Eye Options:**



Spliced Eye

Available in 600' & 1,200' spools.

Family Code: PE

### Polyester 3 Strand Twist Rope

Pelican's 3 strand polyester rope offers excellent durability while maintaining strength. With lower stretch than nylon, this polyester 3 strand offers resistance to abrasions and UV rays. Also, it is resistant to rot, mildew and a variety of fluids and chemicals. This rope is well-suited for marine and industrial applications.

### **Benefits & Features**

- **▼** Great Abrasion Resistance
- **▼** Rot and Mildew Resistant
- ▼ Superior Heat Resistance
- ▼ Excellent UV Resistance
- **▼** Low Elongation
- **▼** High-Strength
- ▼ Economical

CONSTRUCTION: 3 Strand COVER: Polyester

### **Eye Options:**




Spliced Eye (SE)

## **3 STRAND POLYESTER**



1000	C. 107		-	
<b>2</b> 7	- A STATE OF		Ø	
SK	เบ		IN	3
PE*	100	1	5/16	
PE*	120		3/8	
PE*	160		1/2	
PE*a	200		5/8	
PE*a	240		3/4	

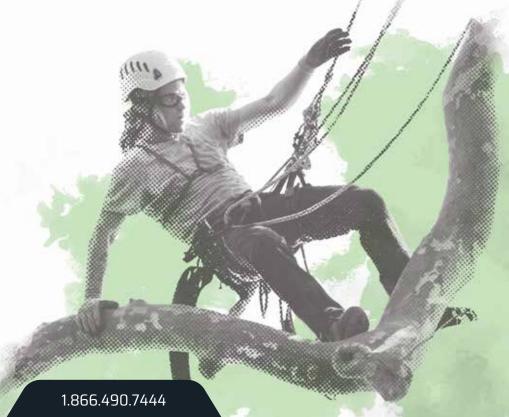

ROPE | RIGGING ROPE | RIGGING

## **RIG MASTER™**



	S/A W		Visi			
7	<b>5</b> 7	Ø	AVG. BREAK STRENGTH	WT. / 100FT		
	SKU	IN	LB	LB	Tracer Color	
	PD-1605	1/2	5,800	5.5	Black	
	PD-2001	5/8	8,600	8.7	Blue	
	PD-2405	3/4	10,500	12.3	Orange	



Family Code: PD

### 3 Strand Composite Rope

Pelican's 3 strand composite rope has the durability required for the job, while remaining lightweight and allowing for a comfortable grip. It also offers excellent energy absorption and abrasion resistance.

#### **Benefits & Features**

- ▼ Very Little Water Absorption
- ▼ Easy Handling & Splicing
- ▼ Color-Coded by Strength
- ▼ Lightweight but Strong

CONSTRUCTION: 3 Strand COVER: Polyester CORE: Polypropylene

### Color-Coded by Diameter:





Blue

Black

### **Eye Options:**



Spliced Eye (SE)

#### Family Code: 7S

# S-12™ SYNTHETIC STAINLESS

### 12 Strand Honeywell Spectra®

Like stainless steel, our synthetic stainless rope is hydrophobic; meaning that it will not absorb water or corrode. This rope has excellent chemical and abrasion resistance, and exceptional flex fatigue.

The S-12 Synthetic Stainless Rope can float and maintains strength even in freezing temperatures. It provides an excellent low temperature performance with a melting point at 300° F and loss of strength at 150° F.



- **▼** Extremely High-Strength
- ▼ Good Flex Fatigue
- ▼ Very Low-Stretch
- **▼** Floats on Water
- ▼ Easy to Splice
- ▼ Torque-Free
- ▼ Low Creep

CONSTRUCTION: 12 Strand COVER: Honeywell Spectra®

## Eye Options:



Spliced Eye (SE)



31

<b>~</b> 7	(	Ď.	TENSILE STRENGTH	WT. / 100FT
SKU	IN	MM	LB	LB
75-040	1/8	3	2,900	0.5
75-060	3/16	5	5,500	1.0
75-080	1/4	6	8,700	1.4
75-100	5/16	8	13,300	2.2
75-120	3/8	9	19,500	3.1
75-140	7/16	11	23,500	4.3
75-160	1/2	12	33,000	6.8
75-180	9/16	14	41,200	7.5
75-200	5/8	16	50,000	11.0
75-240	3/4	18	64,600	13.8
75-280	7/8	22	92,000	20.0
75-320	1	24	110,000	22.3

P-12™



, E		St. State		S. S
75	<b>2</b> 7	Ø	TENSILE STRENGTH	WT. / 100FT
1	SKU	IN	LB	LB
	7D-040	1/8	2,900	0.5
	7D-060	3/16	5,500	1.0
	7D-080	1/4	8,700	1.4
	7D-100	5/16	13,300	2.2
	7D-120	3/8	19,500	3.1
	7D-140	7/16	23,500	6.0
	7D-160	1/2	34,000	6.8
	7D-180	9/16	41,200	7.7
	7D-200	5/8	50,000	9.0
	7D-240	3/4	64,600	13.8
	7DX-280	7/8	95,000	18.7
	7DX-320	1	112,000	20.9

### Eye Options:



Spliced Eye (SE)

#### Family Code: 7D

#### 12 Strand Single Braid - Dyneema®

This high performance rope is an excellent wire rope replacement for industrial and utility applications. Unaffected by oil and common chemicals, this high-strength, very low-stretch rope is easily spliced. The D-12™ also exhibits low flex fatigue, has nearly zero creep, and excellent abrasion resistance.

Dyneema® is pound for pound stronger than steel and additional protection is provided bu our Pelican Tuff™ urethane coating. Professionally hand spliced eyes and chafe guards are available on request. Break strength remains constant in wet or dry conditions making this the perfect choice for mooring, towing lines, winch lines, yachting lines, and commercial fishing ropes. With a specific gravity of .98, this rope floats. It has excellent low temperature performance with a melting point at 300° F and loss of strength at 150° F.

#### Benefits & Features

- **▼** Pelican Tuff<sup>™</sup> Urethane Coated
- ♥ Steel Cable Replacement
- ▼ Extremely High-Strength
- World's Strongest Fiber
- ▼ UV Resistance Coating
- **▼** Good Flex Fatigue
- ▼ Floats on Water
- **▼** Easy to Splice

**CONSTRUCTION**: 12 Strand COVER: Dyneema® SK-75 or SK-78

# 12 Strand Single Braid - Polyester

Family Code: 7PE

This versatile high tenacity rope offers the lowest stretch of all polyester ropes. The quality of construction provides a torque-free rope, eliminating kinks and hockles. This 12 strand single braid provides easy and convenient in-the-field splicing to save time while on the job. The P-12 has a melting point between 489-500° F with a loss of strength between 244-250° F.

Our optional Pelican Tuff™ urethane coating penetrates the fibers providing additional UV protection and increased abrasion resistance. Eyes are professionally hand-spliced at both ends along with an optional polyester chafe guard. This is highly recommended for utility pulling and stringing applications, winch lines, rope slings as well as arborist climbing and rigging assemblies.

#### Benefits & Features

- ▼ UV Resistance Coating
- ▼ Abrasion Resistance
- ▼ Easy to Splice
- ▼ Torque-Free
- ▼ Low-Stretch

**CONSTRUCTION**: 12 Strand **COVER**: Polyester

### **Eue Options:**



Spliced Eye (SE)



Available by the mile! Pelican Tuff™ urethane coating available upon request.

www.pelicanrope.com



# UTILI-TREE™FLIP LINE

Family Code: LYKM

This versatile non-wire core flip line is the ideal solution for arborists working near electrical hazards where wire core flip lines are not an option.

If you work at high altitudes in trees or on utility lines, this flip line is the right fit. Our Pelican Tuff™ urethane coating helps to protect against UV rays and abrasion while the revolutionary ProClimb® Better Grab™ removable rope grab helps you work smoothly without hesitation.

### Benefits & Features

- ▼ Designed for High Altitude Work
- ▼ Can Be Used Near Power Lines
- ▼ Meets ANSI Z359.3/Z133-2017
- ▼ UV & Abrasion Resistant
- ▼ Optional Chafe Guard
- ▼ Non-Conductive Core

7	SKU	Ø	3
**	SKU	IN	
	LY3KM-201C	5/8	





CONSTRUCTION: Kernmantle COVER: Polyester CORE: Nylon



Available lengths of 10' & 15'.



### WIRE CORE FLIP LINE

#### Family Code: FL

Our high visibility flip line is constructed with a tightly braided 16 strand polyester sheath over flexible heavy-duty 1/4" diameter 7x19 galvanized aircraft cable (GAC).

This steel-core kit includes:

- ▼ Flip line lengths of 6', 8', 10', 12', 15', and 18'
- ▼ Choice of Multiple End Fitting Options



### Benefits & Features

▼ Cut-Resistant Wire Rope ▼ Heavy-Duty

▼ Durable

**CONSTRUCTION:** 16 Strand **COVER:** Polyester **CORE**: Wire

#### **End Fittings:**

Steel Swivel (SE)

Steel Fixed (FE)

Aluminum Swivel (ASE)



### ALL-IN-ONE FLIP LINE KIT

#### Family Code: FLK

Complete with all the necessary components including clear shrink tubing that allows for better visibility and improved inspection of

This heavy-duty and economical flip line kit includes:

- ▼ Flip line in lengths of 8', 10', 12' or 15'
- ▼ Aluminum Mini Rope Grab USR-200-MRG
- ▼ Copper Head Carabiner USR-128-A3TU

/4	SKU	Ø	3
	<u> </u>	IN	
	FLK-A16	1/2	
	FLK-A20	5/8	

#### Benefits & Features

▼ All Necessary Parts Included

▼ Economical

▼ Heavy-Duty

**CONSTRUCTION:** 16 Strand **COVER:** Polyester **CORE**: Wire

#### **End Fittings:**







Aluminum Swivel (ASE)



### **BETTER GRAB** FLIP LINE KIT

#### Family Code: FLK3

This set includes all components of our standard All-In-One Flip Line Kit but featuring our brand new Better Grab Rope Grab -USR-300-MRG.

The Better Grab Rope Grab has a(n):

- Stainless steel core
- Anodized aluminum cam
- ▼ Large thumb rest for precise control

1			139
	SKU	Ø	
		IN	1
	FLK3-A16	1/2	
	FLK3-A20	5/8	

#### Benefits & Features

▼ A Convenient, All-In-One Kit ▼ Easy Slack Tending

▼ Economical

**CONSTRUCTION:** 16 Strand **COVER:** Polyester **CORE:** Wire

### **End Fittings:**



Steel Swivel (SE)



Steel Fixed (FE)



Aluminum Swivel (ASE)

#### Benefits & Features

▼ Rope Grab Extends Life of Kit

**CONSTRUCTION:** 16 Strand **COVER:** Polyester

### **End Fittings:**

1/2

5/8

REMOVABLE BETTER GRAB

FLIP LINE KIT

Family Code: FLK33

Line Kit but featuring our Removable Better Grab Rope Grab - USR-

This set includes all components of our standard All-In-One Flip

The Removable Better Grab Rope Grab has a(n):

Removable aluminum cam

SKU

FLK33-A16

FLK33-A20

▼ Ergonomic rubberized cover

Stainless steel core

▼ Superior Cut Resistance

▼ High Visibility Line

**CORE**: Wire

Steel Swivel (SE)





WARNING: These products are conductive. Do not use wire core near electrical lines.



www.pelicanrope.com




## ADJUSTABLE ROPE LANYARD Family Code: LYB/LYT

Our adjustable lanyards are made from 3 strand twisted polyester rope or double braided polyester with hand spliced eyes. Its shrink tubing forms a tapered cover over the tails while the forged alloy steel, ANSI certified double-locking safety snap hooks are tested and rated at 23 kN (5,000 lbs).

•	<b>2</b> 7	Ø	LENGTH	3
Ì	SKU	IN	FT	9
	LYB-160-07A	1/2"	4' - 7'	
	LYB-200-07A	5/8"	4' - 7'	
	LYB-200-10A	5/8"	7' - 10'	



**CONSTRUCTION**: Double Braid **COVER**: Polyester **CORE**: Polyester





**CONSTRUCTION**: 3 Strand **COVER**: Polyester

## **BUCKSTRAP POSITIONING LANYARD**

Family Code: LYAB-16

Our Buckstrap Positioning Lanyard is made from a 16 strand construction that features a polyester sheath over a nylon core. The buckstrap lanyard's built-in prusik simplifies your workload; its easy adjustability makes it an ideal secondary lanyard for arborists and linemen alike.

	A STATE OF THE PARTY OF THE PAR			70.00	_
7	<b>§</b> 7 SKU	Ø	LENGTH	END OPTIONS	7
(	₹	IN	FT	LIND OF HORS	
	LYAB-16	1/2	7	Aluminum Hook (AH)	
			12	Steel Hook (SH)	

### More Options:



Aluminum



▼ Pre-Constructed Prusik Hitch

▼ Easily Adjustable

▼ Supple Grip

**CONSTRUCTION**: 16 Strand **COVER**: Polyester CORE: Nylon



43

LANYARDS & ASSEMBLIES | LANYARDS

### 2-IN-1 LANYARD

Family Code: LYT

The 2-in-1 lanyard is made of 1/2" diameter, 3 strand polyester with double-locking safety snap hooks and includes a prusik runner (PRT-160) for smooth adjustability. The forged steel safety snap hook is rated at 23 kN (5,000 lbs) tensile and is proof load tested.



**CONSTRUCTION:** 3 Strand **COVER:** Polyester





## 2-IN-1 PRUSIK **POSITIONING LANYARD**

Family Code: LYKM

Take advantage of easy ascending without the need to detach the line. This 2-in-1 lanyard's attached prusik hitch adds efficiency and security in movement. The red polyester cover makes it highly visible and easy on the hands. The optional double-locking snaps on either end give even more stability and it is available with either an aluminum hook or a steel hook.

7	y CIVII	Ø	LENGTH	-3
78	SKU	IN	FT	3
	LYKM-162P	1/2	12	

#### End Fittings:



**CONSTRUCTION:** Kernmantle **COVER:** Polyester **CORE:** Nylon



### **POLYESTER LANYARD**

Family Code: AFL

This lanyard assembly is a 16 strand polyester double braid with a handspliced thimble eye and double locking forged steel safety snap.

- ▼ Available in 8', 10', 12'.
- ▼ Safety snap rated 5,000 lbs tensile strength

SKU	Ø	
SKU	IN	7
AFL-1601	1/2	
AFL-201	5/8	

#### **Benefits & Features**

▼ Easy to Handle

▼ Lightweight

▼ Spliceable

**CONSTRUCTION:** 16 Strand **COVER:** Polyester

**CORE**: Polyester





Family Code: LYSE

The Bulldog™ prusik is ideal for tree work, rappelling, and rescue loops. This prusik loop allows you to modify the hitch with any number of different knots applied. It is engineered specifically to provide the perfect grip and offers incredible abrasion resistance. The synthetic Technora® fiber offers exceptional stability and a remarkably high melting point. Featuring hand-sewn eyes, these prusiks are designed to survive longer in some of the most extreme conditions.

7	SKU	Ø MM	CORE	<b>LENGTH</b> FT	7
	LYSE-10T4	8	Technora <sup>®</sup>	28, 30, 32	
	LYSE-13T4	10	Nylon	28, 30, 32, 34	

#### Benefits & Features

▼ Great Energy Absorption

▼ Designed by Arborists

▼ Heat Resistant

**CONSTRUCTION**: Kernmantle **COVER:** Poly-Technora® CORE: Technora® or Nylon



## **TECHNORA®** PRUSIK LANYARD

Family Code: LYSE

This eye-to-eye prusik line with high-strength Technora® is ideal for arborists and search and rescue operations. The lanyard is made with our high-strength Technora® fibers over a nylon core. The heat resistant Technora® cover is quite strong and stands up to rigorous use. This line comes with 1" sewn eyes on each end and in lengths of 28", 30", 32" and 34".

			A	
7	CIVII	Ø	EYE Ø	3
300	SKU	IN	IN	3
	LYSE-11T	11/32	1	

# HIP PRUSIK LANYARD

Family Code: PRB-11T

Use this device to easily lengthen any positioning lanyard! Our hip prusik lanyard is made from high-strength Technora® fiber over a nylon core, making it ideal for rigorous use on 7/16" to 1/2" diameter lines. It is a great alternative to mechanical adjusters as it results in less wear on hoist lines. You can even adjust this hip prusik lanyard with one hand when using it with a micro pulley.

Val	<sup>7</sup> SKU	Ø	LENGTH	-3
1	JKU	IN	FT	7
	PRB-11T-22	11/32	22	
		,		

#### **Benefits & Features**

▼ Stronger than Double Braid

▼ Heat Resistant

▼ Durable

**CONSTRUCTION**: Kernmantle **COVER:** Technora® **CORE**: Nylon

> **CONSTRUCTION**: Kernmantle COVER: Technora® **CORE:** Nylon

1.866.490.7444

#### Benefits & Features **End Fittings:**

▼ Easy, One-Handed Adjustments Steel Snap (CF07)

Aluminum Swivel (22)

Aluminum Snap (50AB)

Aluminum Snap (145ARU)







## **BETTER GRAB TOWER POSITIONING LANYARD**

Family Code: LYKM-162

The standard in positioning lanyards for tower and pole climbing work is also popular among arborists and other tree workers. This lanyard includes:

- ▼ 1/2" Static Master™ lanyard in lengths of: 6', 8', 10', 12' or 15'
- **▼** Chafe Master<sup>™</sup> protective abrasion sleeve
- ▼ ProClimb™ Better Grab Rope Grab
- ▼ Variety of end options
- ▼ Thimble



#### **End Fittings:**



**ANSI Aluminum** Snaphook (AA)



Aluminum Twist-Lock Carabiner (AT)



Aluminum Rebar Hook (AR)



Steel Twist-Lock Carabiner (ST)

### Benefits & Features

▼ Meets OSHA 1926.502/1910.268 ▼ Meets ANSI Z359.3-2017

▼ A Useful, All-in-One Kit

▼ Ideal for Restraint

**CONSTRUCTION:** Static Kernmantle **COVER**: Polyester

**CORE:** Nylon









## **BETTER GRAB ARBORIST POSITIONING LANYARD**

Family Code: LYAR-1605

This is the ultimate in arborist positioning lanyards. This gear includes:

- **▼** 1/2" Arborist-16<sup>™</sup> lanyard in lengths of: 6', 8', 10', 12' or 15'
- **▼** Optional Chafe Master<sup>™</sup> protective abrasion sleeve
- ▼ ProClimb™ Better Grab Rope Grab
- ▼ Variety of end options
- **▼** Thimble



#### End Fittings:



**ANSI Aluminum** Snaphook (AA)



Aluminum Triple-Lock Carabiner (AT)

Snaphook (SH)



Snaphook (AH)



▼ A Convenient, All-in-One Kit

Aluminum Triple-Lock

Swivel Carabiner (AC)

- ▼ Exceptional Static in Line
- ▼ Ideal for Restraint

1.866.490.7444

**CONSTRUCTION: 16 Strand COVER:** Polyester **CORE**: Nylon



Fixed-eye options create reliable anchoring points!



# E-Z MOVETM POSITIONING LANYARD

Family Code: LYKKM

Our E-Z Move™ Positioning Lanyard is an easy-to-use positioning device that is lightweight and compact. This restraint device is constructed from 7/16" Static Master™ rope that allows for smooth adjustment even under load. The E-Z Move features a Kong® Trimmer rope grab that has an ergonomic design for precise control. This positioning lanyard also includes the Chafe Master™ tubular sleeve which protects the rope at contact point.

This lanyard is ANSI Z359.3 & OSHA 1910 / 1926 compliant.





Available lengths of 6', 8', 10', 12', and 15'.

### **Benefits & Features**

▼ Abrasion Resistant

▼ Incredibly Smooth

▼ Lightweight

**CONSTRUCTION**: Kernmantle

**COVER**: Polyester CORE: Nylon

### **End Fittings:**



ANSI Aluminum Snaphook (AA)





Snaphook (SH)



Aluminum Twist-Lock Carabiner (AT)




Steel Twist-Lock



Rebar Hook (AR)



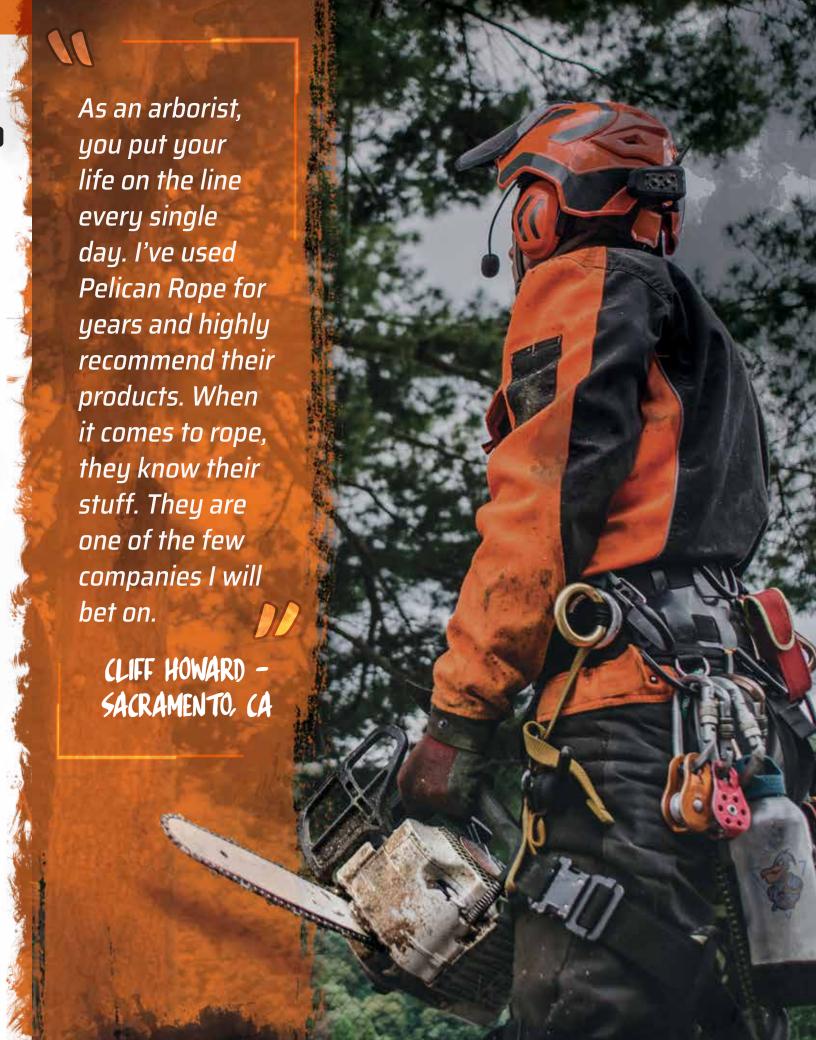

Family Code: LYB

# ADJUSTABLE POSITIONING LANYARD

Family Code: LYTPD

Our adjustable positioning langard permits you to work "hands-free" while tree rigging or scaling a tower.

This gear includes:

- ▼ 5/8" composite rope.
- ▼ Chafe Master<sup>™</sup> protective abrasion sleeve.
- ▼ Proclimb™ ANSI double-locking snap hook.
- ▼ Dual-cam steel rope grab.

Weight Capacity: 310 lbs

- ▼ Very Little Water Absorption
- ▼ Lightweight, Yet Strong
- ▼ Easy Adjustments

**CONSTRUCTION**: 3 Strand **COVER**: Polyester

-		1100	10/2		-
\$	SKU	Ø	LENGTH	WEIGHT	
	31.0	IN	FT	LB	3
	LYTPD-2001-06FTD	5/8	6	2.5	
	LYTPD-2001-08FTD	5/8	8	2.7	



#### Benefits & Features

- ▼ Developed by Arborists
- ▼ Low-Stretch
- **▼** Durable

**CONSTRUCTION**: Double Braid

**COVER**: Polyester **CORE**: Polyester



ANSI Z359.3 / Z133-2017 / A10.32 & OSHA 1926.502 compliant.

### RESTRAINT & POSITIONING LANYARD

When used properly, our restraint and positioning lanyard keeps you at a safe distance from edging.

This gear includes:

- ▼ 5/8" composite rope.
- ▼ Chafe Master™ protective abrasion sleeve.
- ▼ Proclimb™ ANSI double-locking snap hook.

Weight Capacity: 310 lbs

#### Benefits & Features

- ▼ Very Little Water Absorption
- ▼ Lightweight, Yet Strong
- Abrasion Resistant

**CONSTRUCTION**: 3 Strand **COVER**: Polyester

	A solution of the solution of	100		7500	
7	<sup>7</sup> SKU	Ø	LENGTH	WEIGHT	-3
74	טאכ	IN	FT	LB	-39
	LYTPD-2001-03FF	5/8	3	1.5	
	LYTPD-2001-04FF	5/8	4	1.6	
	LYTPD-2001-06FF	5/8	6	1.8	







**BERANEK LANYARD** 

kN (5,000 lbs) and enforced with a plastic round thimble.

LYB-200

Available lengths: 8', 10', and 12'.

Originally developed by tree care pioneer Jerry Beranek, the Pelican Beranek Lanyard

consists of a hand-spliced, double braid polyester rope with a double-locking safety snap hook at one end and a back spliced bitter end. The braided flip line is used with a prusik

runner to complete the Beranek system. The forged steel safety snap hook is rated at 23

5/8

### **CHAINSAW LANYARD**

Family Code: LYB

This chainsaw lanyard is designed with a brass swivel snap that is swaged onto a 3.5' length of 1/4" diameter kernmantle line and a 10" loop. The lanyard can be hitched to a saw handle by placing the snap end through the loop to form a hitch at the other end to attach to your saddle. This allows for complete control of the chainsaw even while falling below the climber's feet when accidentally dropped.

A SKU	Ø	ROPE LENGTH	OVERALL LENGTH	3
A SKU	IN	IN	IN	3
LYB-08Y-42	1/4	39	42	

#### Benefits & Features

▼ Brass Swivel Snap ▼ 10" Loop

**CONSTRUCTION**: Kernmantle

ANSI Z359.3 / Z133-2017 / A10.32 & OSHA 1926.502 compliant.

www.pelicanrope.com

# ARBORIST SPLIT TAIL Family Code: AST

### Tree Rigging Split Tail

Pelican's split tails provide the quality and versatility that arborists have come to expect from our ropes.

This 16 strand double ply braid has a polyester cover with a non-rotational

SKU	Ø	TENSILE STRENGTH	LENGTH
*	IN	LB	FT
AST-160	1/2	8,260	5

#### Benefits & Features

- ▼ Versatile for Tree Rigging
- ▼ Excellent Quality
- ▼ High Visibility

**CONSTRUCTION**: 16 Strand

**COVER**: Polyester **CORE**: Polyester

Available with a 1" or 5" soft eye hand-spliced into one end.



Join our initiative to become more sustainable with our eco-friendly split tail. This nowaste line is made from leftover materials from our warehouse without compromising the quality of the product. Its small, tight sewn eye allows for secure and reliable connections for climbing and rigging components while maintaining rope strength.

	SKU	Ø	TENSILE STRENGTH	LENGTH	3
Z	JKU	IN	LB	FT	1
	AAST-160	1/2	7,150	5	

#### Benefits & Features

- ▼ Increased Versatility for Tree Rigging
- ▼ Eco-Friendly Green Product
- ▼ Small, Tight Sewn Eye

**CONSTRUCTION**: 16 Strand **COVER**: Polyester

CORE: Nylon





Assorted color selected at random.





### ARBORIST DEAD EYE SLING

#### Family Code: ADE

Pelican's dead eye slings and false crotch block slings maintain maximal quality and adaptability that arborists have come to expect from our ropes.

These dead eye slings are Pelican Tuff™ urethane coated for abrasion resistance and have a 6" eye on one end with optional chafe guard (as shown).

_	A STATE OF THE PARTY OF THE PAR	The state of	1000	1000	_
Total Total	<sup>7</sup> SKU	Ø	TS	COLOD	
74	SKU	IN	LB	COLOR	
	ADE-20C5	5/8	16,000	Orange	
	ADE-24CY	3/4	25,000	Yellow	
	ADE-32C2	1	45,000	Red	

Available in lengths of 8', 10', 12', 15', and 20'. Custom lengths also available upon request.

#### Benefits & Features

- ▼ Tough Polyurethane Coating
- ▼ High Tensile Strength
- ▼ Shock Absorbent

CONSTRUCTION: Double Braid COVER: Polyester CORE: Nylon

#### More Color Options:





Orange Y

#### Family Code: APDE2

**DEAD EYE TREE SLING** 

Pelican's tough yet durable dead eye tree sling has a large eye which is ideal for strap-hitching the sling with an additional sling or carabiner.

Made from 100 percent polyester, this 12 strand dead eye sling is urethane coated for abrasion resistance and provides a 12" eye on one end with a chafe guard covered eye to protect from abrasion.



Available in lengths of 10', 12', 14', and 16'.
Custom lengths also available upon request.

#### Benefits & Features

- ▼ Ideal Base Anchor in Rigging System
- ▼ Easy Port-A-Wrap Installment
- ▼ Secure Grip on Trees

CONSTRUCTION: 12 Strand COVER: Polyester






## **ADJUSTABLE** RIGGING BLOCK SLING

Family Code: APADE2

Create girth hitches at the base of a tree with ease and efficiency with this rigging block sling. Its unique setup includes multiple pockets allowing for a simple termination with minimal need for additional hardware. This is an intuitive and hassle-free setup with maximum adjustability.





#### Benefits & Features

- ▼ Streamlines Workflow
- ▼ Multi-Spliced Pockets
- ▼ Easy Adjustability

**CONSTRUCTION: 12 Strand COVER:** Polyester

More Color Options:



Green




## **ADJUSTABLE** RIGGING SLING

Family Code: APADE2

The Adjustable Rigging Block Sling is a low-stretch, abrasion resistant line with maximum versatility. Its variable eyes, large pockets for adjustment, Chafe Master™ chafe guard, and custom Tuff Coat™ urethane coating make this the best rigging sling on the market.

To the second	<sup>7</sup> SKU	Ø IN	MBS LB	<b>LENGTH</b> FT	EYE Ø	COLOR	
	APADE2-20C1-E	5/8	14,800	7, 10, 12, 15	12	Blue	
	APADE2-24C3-E	3/4	20,000	10, 12, 15	12	Green	



#### Benefits & Features

- ▼ Better Alternative to Carabiner
- ▼ Rig with Single Piece of Gear
- ▼ Knot-Free Adjustments

**CONSTRUCTION: 12 Strand COVER:** Polyester

More Color Options:



Green



## **ADJUSTABLE** RIGGING RING SLING

Family Code: APADE2

Our Adjustable Rigging Ring Sling provides a lightweight and easily adjustable rigging option for arborists. Pelican's soft anchor ring sling features multiple pockets that allow for nofuss, knotless, adjustments. This sling is sturdy yet flexible, and our Tuff Coat™ urethane coating helps to prevent picking.

		The same of the sa		7500	
7	SKU	Ø	MBS	LENGTH	COLOR
1	<del>y</del> 5/(0	IN	LB	FT	COLOIT
	APADE2-20C1-R	5/8	14,800	7, 10, 12, 15	Blue
	APADE2-24C3-R	3/4	20,000	10, 12, 15	Green



#### Benefits & Features

- ▼ Extremely Low-Stretch
- ▼ Friction Reduction
- ▼ Multiple Pockets

**CONSTRUCTION: 12 Strand COVER:** Polyester

More Color Options:





## **ADJUSTABLE DUAL-HEAD RING SLING**

Family Code: APADE2

This double-ringed rigging sling is the ideal attachment sling for a variety of rigging applications. This 12 strand Brummel lock-spliced sling is easy-to-use for novice and pro arborists alike. Its multi-pocket design allows for much stronger choke configurations than dead eye, whoopie or loopie slings.

V	SKU	Ø	MBS LB	<b>LENGTH</b> FT	COLOR
	APADE2-20C1-RR	5/8	14,800	7, 10, 12, 15	Blue
	APADE2-24C3-RR	3/4	20,000	10, 12, 15	Green



#### Benefits & Features

- ▼ No-Nonsense Tree Choking
- ▼ Extremely Strong
- ▼ Durable

**CONSTRUCTION: 12 Strand COVER:** Polyester

More Color Options:



Blue

58

GET





# FRICTION SAVER

Family Code: LYFS

Pelican Rope's friction saver comes with an adjustable design that holds up to the rigors of tree work. The friction saver's ring and ring construction provides effortless retrieval from the ground, making your hitch more responsive and easy to install.

This arborist tool makes climbing double rope a breeze. Best of all, it is better on the tree and ropes as it decreases the amount of friction going up and down the tree.

#### Benefits & Features

Wear Resistant

▼ Lightweight

▼ Strong

***		
	ALANA CONTRACTOR OF THE PARTY O	

			THE REAL PROPERTY.	
7	SKU	Ø	LENGTH	-73
×		IN	FT	3
	LYFS-204Y	5/8	8, 10	



COVER: Polyester CORE: Nylon





## HARDWARE ASCENDERS

# BIG 8 ALUM. **DESCENDER W/ EARS**

▼ Aluminum Alloy ▼ Anodized

ITEM CODE USR-840-AU

ROPE SIZE Ø 9 mm to Ø 16 mm

MBS 40 kN

WT. 9.1 oz



▼ Stainless Steel

ITEM CODE USR-850-S

ROPE SIZE Ø 11 mm to Ø 16 mm

MBS 50 kN

26 oz WT.

#### **ALUM. FIGURE 8 DESCENDER**

Aluminum Alloy

▼ Anodized

ITEM CODE USR-835-AU

ROPE SIZE Ø 9 mm to Ø 12 mm

MBS 35 kN

WT. 4.3 oz

#### ALUM. CLASSIC 8 DESCENDER

▼ NIT 271-1 / NIT 271-2

Aluminum Alloy

Anodized

ITEM CODE KNG-805-03

ROPE SIZE Ø 9 mm to Ø 12 mm

WT. 3.9 oz



#### TRENDER ALUM. DOUBLE ASCENDER

Aluminum Alloy

▼ Stainless Steel

ITEM CODE KNG-874-03

ROPE SIZE Ø 8 mm to Ø 13 mm

220.4 mm LENGTH

WT. 19.4 oz

**C** € EN567 EN795/B EN12841/B

#### LIFT ASCENDER

▼ For Left or Right Hand

Aluminum Alloy

ITEM CODE KNG-896-5 / KNG-896-D

ROPE SIZE Ø 8 mm to Ø 13 mm

LENGTH 193 mm

7.9 oz

WT.

**C** € EN567 EN12841/8

65

### **FUTURA HAND ASCENDER**

For Left or Right Hand

▼ Aluminum Alloy

ITEM CODE | KNG-876-005 / KNG-876-00D ROPE SIZE Ø 8 mm to Ø 12 mm LENGTH 140 mm

WT. 4.4 oz

**C E** EN12841/8





#### BETTER GRAB REMOVABLE ROPE GRAB

ITEM CODE USR-MRG-333

ROPE SIZE Ø 7/16" to Ø 5/8"

WT. 8.7 oz ▼ Large Thumb Rest for Precise Control

Removable Aluminum Alloy Cam

▼ Ergonomic, Rubberized Cover

▼ Stainless Steel Core

### RESCUE SWIVEL

▼ Aluminum Alloy

▼ NFPA 1983-G

▼ Ball Bearing

▼ Anodized

ITEM CODE	USR-DSL-AN
MBS	◆ 40 kN
LENGTH	108 mm
WT.	5.6 oz





#### **ALUMINUM MINI ROPE GRAB**

ITEM CODE USR-MRG-200

ROPE SIZE Ø 11 mm to Ø 16 mm

WT. 11 oz ▼ Removable Cam

▼ Fixed Bolt & Nut

▼ Aluminum Alloy

▼ Hard Anodized

### **ALUMINUM EYE-TO-EYE SWIVEL**

▼ Aluminum Alloy

**▼** Ball Bearing

Anodized

ITEM CODE	USR-DSR
MBS	<b>→</b> 22 kN
LENGTH	83.5 mm
WT.	3.2 oz



**( €** EN354

### **DUCK MULTI-USE BELAY DEVICE**

ITEM CODE KNG-888

ROPE SIZE Ø 8 mm to Ø 13 mm

WT. 2.5 oz ▼ Aluminum Alloy

### FORGED ALUMINUM EYE-TO-EYE SWIVEL

▼ Aluminum Alloy

▼ Ball Bearing

▼ Anodized

ITEM CODE	USR-DSL-A
MBS	<b>→</b> 40 kN
LENGTH	108 mm
WT.	5.6 oz





### BACK-UP FALL ARRESTER W/ CARABINER

ITEM CODE KNG-802

ROPE SIZE Ø 10 mm to Ø 12 mm

7.2 oz WT.

Aluminum Alloy ▼ Stainless Steel

www.usrigging.com

C € EN353-2 EN358 EN567 EN12841/A/E



**C €** EN362 € ANSIZ359.12 CSA 2259.12

68

#### STEEL FIXED-EYE SNAPHOOK

▼ Zinc-Plated, High-Tensile Steel **V** Double Action Gate

**W** ANSI Z359.12-2009

ITEM CODE	USR-01-CF09B
GATE	16 kN Ø 20 mm
MBS	◆ 23 kN
WT.	10.3 oz



**C €** EN362 **⑤**\* ANSIZ359.12





#### STEEL FIXED-EYE SNAPHOOK

▼ Zinc-Plated, High-Tensile Steel Double Action Gate

**W** ANSI Z359.12-2009

ITEM CODE USR-01-CFE9		
GATE	16 kN Ø 20 mm	
MBS	◆ 23 kN	
WT.	10.2 oz	

STEEL SWIVEL SNAPHOOK





**RED BARON SNAPHOOK** 

W/ FIXED-EYE

**V** Double Action Gate

GATE

MBS

WT.

Anodized Aluminum Alloy

ITEM CODE USR-40-A

Ø 22 mm

◆ 27 kN

5.0 oz

FORGED ALUM. SNAPHOOK

Double Action Gate



#### FORGED ALUM. SWIVEL SNAPHOOK

Anodized Aluminum Alloy ▼ Double Action Gate **W** Keylock

ITEM CODE	USR-145S-ABK
GATE	Ø 26 mm
MBS	<b>◆ 28 kN</b>
WT.	6.5 oz





▼ Zinc-Plated, High-Tensile Steel ▼ Double Action Gate **W** ANSI Z359.12-2009

ITEM CODE	USR-01-CF07
GATE	16 kN Ø 29 mm
MBS	<b>→</b> 45 kN
WT.	12.2 oz









### ITEM CODE USR-02-CS09B GATE 16 kN Ø 21 mm

▼ Zinc-Plated, High-Tensile Steel

**V** Double Action Gate

**W** ANSI Z359.12-2009



▼ Zinc-Plated, High-Tensile Steel

ITEM CODE USR-02-CSE

Double Action Gate

STEEL SWIVEL SNAPHOOK



#### ALUM. SNAPHOOK W/ FIXED-EYE

Anodized Aluminum Alloy ▼ Double Action Gate **W** Keylock















ITEM CODE USR-01-CF09

16 kN Ø 22 mm

**◆ 23 kN** 

12.6 oz

STEEL FIXED-EYE SNAPHOOK

▼ Zinc-Plated, High-Tensile Steel Double Action Gate

**W** ANSI Z359.12-2009

GATE

MBS

WT.

0
dile

**C E** EN 362









ATE	Ø 19 m

MBS ◆ 23 kN WT. 13.6 oz

▼ Zinc-Plated, High-Tensile Steel

ITEM CODE USR-02-CS07

Double Action Gate

**W** ANSI Z359.12-2009

STEEL SWIVEL SNAPHOOK



### ITEM CODE USR-59-AY

Anodized Aluminum Alloy

Double Action Gate

**W** ANSI Z359.12-2009

GATE	16 kN Ø 26 mn
MBS	<b>→ 23 kN</b>
WT.	8.9 oz



#### TANGO FIXED-EYE SNAPHOOK

Anodized Aluminum Allou Double Action Gate **K**eylock

ITEM CODE	KNG-715-BLK
GATE	<b>≥</b> 15 kN Ø 26 mm
MBS	◆ 33 kN \$ 10 kN
WT.	4.6 oz



#### ALUM. SNAPHOOK W/ FIXED-EYE

Anodized Aluminum Alloy **V** Double Action Gate

**W** ANSI Z359.12-2009





# ▼ Zinc-Plated, High-Tensile Steel

V NSN 5340-01-157-6088 Double Action Gate

ITEM CODE	USR-01-CFE
GATE	Ø 18 mm
MBS	<b>→</b> 23 kN
WT.	10.4 oz



<b>M</b>





GATE



**C E** RN362

www.usrigging.com

16 kN Ø 27 mm

#### **FAST-RUBBER ROPE FASTENER**



▼ Universal Size **Rubber** 

ITEM CODE KNG-810-1

CARABINER Body Ø 8 to 11 mm

0.1 oz

(NS)

**FAST-NYLON ROPE FASTENER** 



▼ Universal Size

**W** Nulon

ITEM CODE KNG-813

CARABINER Body Ø 8 to 11 mm

(KS)

#### **FAST-INOX RETAINER CLIP**



▼ Stainless Steel

**Reusable** 

ITEM CODE KNG-810-08

CARABINER Body Ø 8 mm



#### **FAST-INOX RETAINER CLIP**



▼ Stainless Steel

**Reusable** 

ITEM CODE KNG-810-12

CARABINER Body Ø 12 mm

www.usrigging.com

(No.



#### EQUAL D STEEL CARABINER



SKU	USR-12-CTLD		
GATE	16 kN 😂 13 kN Ø 14 mm		

WT. 7.6 oz



USR-14-C3T SKU GATE 16 kN Ø 20 mm MBS ◆ 45 kN WT. 11.0 oz

#### STEEL LADDER HOOK CAPTIVE EYE STEEL CARABINER W/ CAPTIVE PIN

▼ Zinc-Plated, High-Tensile Steel **W** ANSI Z359.12-2009 Triple Lock Gate **K**eylock

	SKU	USR-71-C09B	
1	GATE	16 kN Ø 48 mm	
	MBS	◆ 40 kN	
	WT.	15.8 oz	





#### MOD. D STEEL CARABINER

WT.





GATE 16 kN ≈ 12 kN Ø 20 mm ◆ 50 kN \$ 16 kN

KLETTERSTEIG

#### **CAPTIVE EYE STEEL CARABINER**



USR-14-C9Y

GATE 16 kN Ø 20 mm MBS ◆ 23 kN

10.7 oz

WT.

#### STEEL LADDER HOOK W/ CAPTIVE PIN



**ANSI Z359.12-2009** 

▼ Zinc-Plated, Alloy Steel

▼ Twist Lock Gate

SKU	USR-04-C09A	
GATE	16 kN Ø 52 mm	
MBS	<b>→</b> 35 kN	
WT.	28.6 oz	

# 

**W** ANSI Z359.12-2009

USR-12-CTL

**◆** 45 kN **♦** 16 kN

9.9 oz

Twist Lock Gate

**V** Keylock

MBS

WT.



9.0 oz

#### STEEL LADDER HOOK W/ CAPTIVE PIN



▼ Zinc-Plated, High-Tensile Steel

**W** ANSI Z359.12-2009 ▼ Twist Lock Gate

W Keulock

V Regiotic		
SKU	USR-71-CO9A	$\neg \subset$
GATE	16 kN Ø 48 mm	_ /
MBS	◆ 40 kN	
WT.	15.7 oz	

LADDER HOOK W/ CAPTIVE PIN ▼ Zinc-Plated, Alloy Steel



FORGED SCAFFOLD

**W** ANSI Z359.12-2009

**C €** EN362 **⑤**\* ANSI 2359.12 CSA 2259.12

▼ Twist Lock Gate


ij	SKU	USR-04-C09B	
	GATE	16 kN Ø 54 mm	
	MBS	◆ 50 kN	
	WT.	27.8 oz	










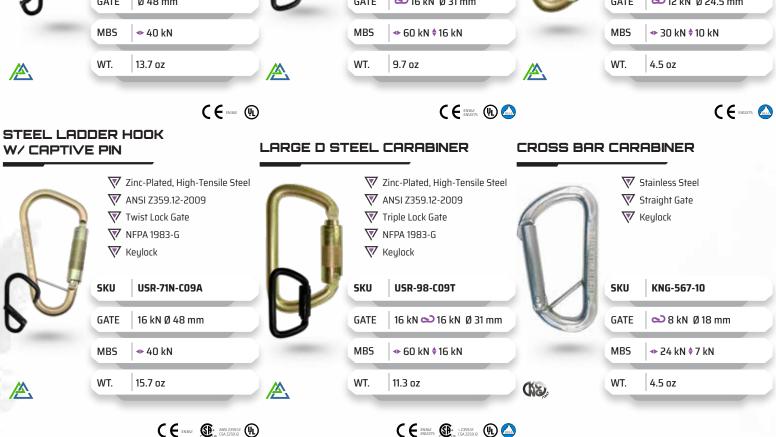

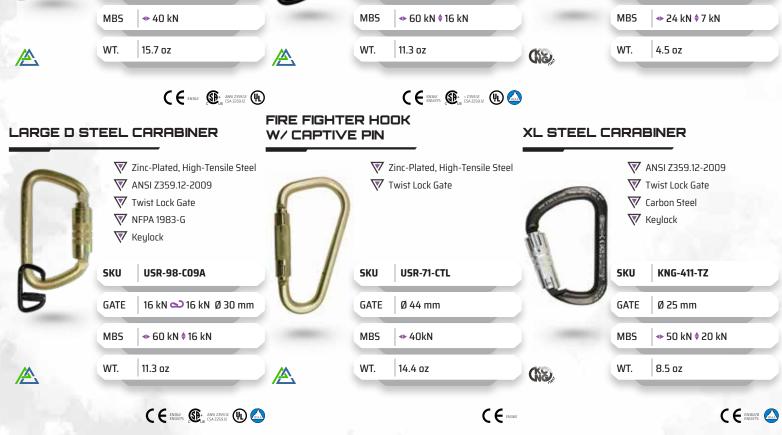







**C E** EN12275

**C E** EN362

#### I-BEAMER CARABINER LITE



Anodized Aluminum Alloy ▼ Triple Lock Gate

▼ NFPA 1983

**W** Keylock

SKU	USR-19-A3T
GATE	<b>№</b> 8 kN Ø 23 mm
MBS	◆ 27 kN \$ 9 kN
WT	3.4 oz

#### I-BEAMER CARABINER LITE



Anodized Aluminum Alloy ▼ Twist Lock Gate ▼ NFPA 1983

**W** Keylock

SKU	USR-19-ATL		
GATE	<b>№</b> 8 kN Ø 23 mm		
MBS	◆ 27 kN \$ 9 kN		
WT.	3.6 oz		

#### I-BEAMER CARABINER



Anodized Aluminum Alloy **ANSI Z359.12-2009** ▼ Triple Lock Gate

▼ NFPA 1983

▼ Keulock

( Neglock		
SKU	USR-19-A3T9	
GATE	16 kN <b>⇔</b> 8 kN Ø 18 mm	
MBS	◆ 27 kN \$ 16 kN	
WT.	4.1 oz	

#### ALUM. SWIVEL CARABINER



Anodized Aluminum Alloy ▼ Triple Lock Gate **W** Keylock

SKU	USR-221-A3TU
GATE	Ø 20 mm
MBS	◆ 25 kN
WT.	6.0 oz

**C E** EN362

#### I-BEAMER CARABINER



Anodized Aluminum Alloy **ANSI Z359.12-2009** 

▼ Twist Lock Gate

▼ NFPA 1983

▼ Keylock		
SKU	USR-19-AT9	
GATE	16 kN 😂 8 kN Ø 18 mm	
MBS	◆ 27 kN \$ 16 kN	
WT.	4.1 oz	

#### TRUE OVAL ALUM. CARABINER



Anodized Aluminum Alloy Triple Lock Gate

**W** Keylock

SHOOT SHOT SH	SKU	USR-127-A3TU
	GATE	Ø 19 mm
	MBS	◆ 5,000 lb \$ 7 kN
	WT.	2.9 oz

# C EN362 EN12275

#### TRUE OVAL ALUM. CARABINER



Anodized Aluminum Alloy ▼ Straight Gate

**W** Keylock

	SKU	USR-127-AU
	GATE	<b>◇</b> 7 kN Ø 22 mm
	MBS	◆ 5,000 lb ♦ 7 kN
\	WT.	2.4 oz

#### FORGED HMS CARABINER



Anodized Aluminum Alloy Triple Lock Gate

**W** Keylock USR-125-A3TU SKU GATE Ø 26 mm WT. 3.1 oz

#### 



#### **COPPER HEAD CARABINER**



Anodized Aluminum Alloy ▼ Triple Lock Gate

**W** Keylock

SKU	USR-128-A3TU
GATE	Ø 23 mm
MBS	◆ 24 kN \$ 8 kN
WT.	3.4 oz

#### **FIXED-EYE ALUM. CARABINER**



Anodized Aluminum Alloy Triple Lock Gate

▼ Keulock

,	.cegioci.
SKU	USR-140-A3TU
GATE	Ø 22 mm
MBS	◆ 28 kN
WT.	3.9 oz
	SKU GATE MBS






#### ALUM. BIG D CARABINER









SKU	USR-107-A3TU
GATE	Ø 22 mm
MBS	◆ 28 kN \$ 8 kN
WT.	3.0 oz

Anodized Aluminum Alloy



**ANSI Z359.12-2009** 

Triple Lock Gate **W** Keylock

FORGED MOD. D ALUM. CARABINER

SKU USR-12M-A3TU GATE 16 kN Ø 22 mm

MBS ◆ 24 kN WT. 5.2 oz





www.usrigging.com

1.866.490.7444

# HARDWARE | ALUMINUM CARABINERS



MOD. D ALUM. CARABINER



Anodized Aluminum Alloy

**ANSI Z359.12-2009** 

USR-14-ATL9

GATE 16 kN Ø 30 mm

◆ 25 kN

▼ Twist Lock Gate

FIXED-EYE ALUM. CARABINER

SKU

MBS

WT. 5.6 oz



#### MICRO 900 CARABINER







MINI D CARABINER



Aluminum Alloy

#### FIXED-EYE ALUM. CARABINER MOD. D RESCUE CARABINER

ANSI Z359.12

EN362

B. ANSI Z359.12

CSA Z259.12







**( €** EN362










C EN362/B CILLA

C € EN12275

C EN362/B EN12275

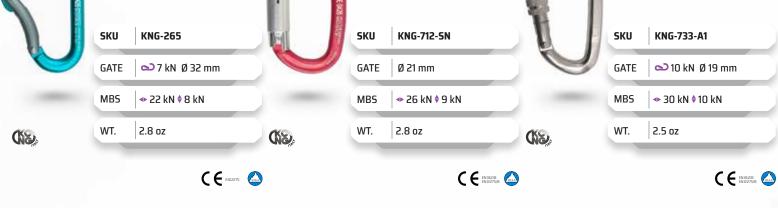



1.866.490.7444 www.usrigging.com

MARNING: Not for human support.



78











#### **FERRATA EXPRESS** CARABINER

▼ Aluminum Alloy ▼ Slide Lock Gate ▼ Keulock		
SKU	KNG-778-G1	

GATE	<b>ಎ</b> 12 kN Ø 27 mm	
	1	
MBS	◆ 30 kN \$ 10 kN	
WT.	3.2 oz	
	I	



-	_	FN362/R	
	┖	EN12275	MAA

#### **FERRATA CARABINER**

V	Aluminum Alloy
$\overline{\mathbb{A}}$	Triple Lock Gate
$\triangle$	Keylock

SKU	KNG-778-5N
GATE	Ø 26 mm
MBS	<b>→</b> 30 kN <b>♦</b> 8 kN
WT.	3.4 oz

**HMS PEAR CARABINER** 

KNG-786-A1

**◆** 22 kN **♦** 8 kN

HMS PEAR CARABINER

KNG-786-SN

**◆** 22 kN **♦** 8 kN

Aluminum Alloy Screw Lock Gate **W** Keylock

GATE Ø 25 mm

WT. 3.1 oz

Aluminum Allou Triple Lock Gate **W** Keylock

GATE Ø 23 mm

WT. 3.4 oz

SKU

MBS

SKU



	0	E	
000	67		A
9	2		KN 26
		•	6







#### XL ALUM. RESCUE CARABINER

V	Aluminum Alloy
V	Screw Lock Gate
<b>V</b>	Keulock

SKU	KNG-911-A1
GATE	<b>ಎ</b> 9 kN Ø 27 mm
MBS	◆ 30 kN \$ 9 kN
WT.	3.2 oz

#### XL ALUM. **RESCUE CARABINER**

V	Aluminum Alloy
$\nabla$	Triple Lock Gate
w	Keylock

SKU	KNG-911-SN	
GATE	Ø 26 mm	
MBS	◆ 30 kN \$ 9 kN	
WT.	3.4 oz	

#### **FROG CABLE**

abla	Auto-Closure Gate
$\nabla$	Aluminum Alloy

SKU	KNG-700-200	
GATE	Ø 12.7 mm	
MBS	<b>◆ 26 kN</b>	
WT.	1.8 oz	

#### FROG EXPRESS

$\nabla$	Auto-Closure Gate	
width	Aluminum Alloy	

SKU	KNG-761-120B	
GATE	Ø 12.7 mm	
MBS	◆ 22 kN	
WT.	2.5 oz	

#### STAINLESS STEEL RIGGING RING

▼ Forged Stainless Steel

ITEM CODE	USR-28-S
MBS	◆ 24 kN
OUTSIDE	Ø 52 mm
INSIDE	Ø 28 mm
WT.	3.7 oz



#### STAINLESS STEEL RIGGING RING

▼ Forged Stainless Steel

ITEM CODE	USR-46-S
MBS	<b>→</b> 24 kN
OUTSIDE	ø 70 mm
INSIDE	ø 46 mm
WT.	5.4 oz



#### **FORGED STEEL RIGGING RING**

▼ Forged Alloy Steel ▼ Zinc-Plated

ITEM CODE	DBF-2004-1
ULT. LOAD	◆ 150 kN
OUTSIDE	Ø 102 mm
INSIDE	ø 76 mm
WT.	10.0 oz





www.usrigging.com

1.866.490.7444

#### MICRO PULLEY

- ▼ Anodized Aluminum Alloy
- ▼ Single Sheave
- ▼ Swing Side

HARDWARE PULLEYS

ProClimb

1

MBS kN30

80



TEM	CODE	USR-P16

MBS   30 kN WT.   5.8 oz	ROPE SIZE	Up to Ø 13 m
WT. 5.8 oz	MBS	30 kN
	WT.	5.8 oz



#### **ALUMINUM SWING PULLEY**

- ▼ Anodized Aluminum Alloy
- ▼ Single Sheave
- ▼ Swing Side

#### EXTRA ROLL ALUMINUM PULLEY

- ▼ Anodized Aluminum Alloy
- ▼ Single Sheave
- ▼ Extra Roll



ITEM CODE	USR-PMS-AU
ROPE SIZE	Up to Ø 11 mm
MBS	20 kN
WT.	4.3 oz

CE ENIZZ78



**ALBY TREE RIGGING BLOCK** 

ITEM CODE USR-PSW-AU

ROPE SIZE Up to Ø 16 mm

MBS 30 kN

WT. 8.7 oz

**B1** 



#### **FIXED-SIDE MINI PULLEY**

- ▼ Anodized Aluminum Alloy
- ▼ Single Sheave



ITEM CODE	USR-PFB-AU
ROPE SIZE	Up to Ø 13 mm
MBS	5,000 lb
WT.	3.0 oz



#### ALUMINUM SWING-SIDE PULLEY

- ▼ Anodized Aluminum Alloy
- ▼ Twin Sheave
- ▼ Swing Side

ProC	Climb
MBS kn 30 kn 30 kn 30 kn 2x7.5 2x7.5	© S-2127
USE ROPE MAXØ16mm USR-PTW-AU	CE 0321 UIAA ENIZZYS 16PS [JR
T	MN DE
	15 kN 1

ITEM CODE	USR-PTW-AU
ROPE SIZE	Up to Ø 16 mm
MBS	30 kN
WT.	14.9 oz

CE ENIZZ78



▼ Aluminum Alloy

▼ Taper Bush Lock

▼ Single Sheave


▼ Swing Side

KNG-839
Up to Ø 26 mm
50 kN
93%
40.6 oz

**C €** EN795/B EN12278

www.usrigging.com 1.866.490.7444

82

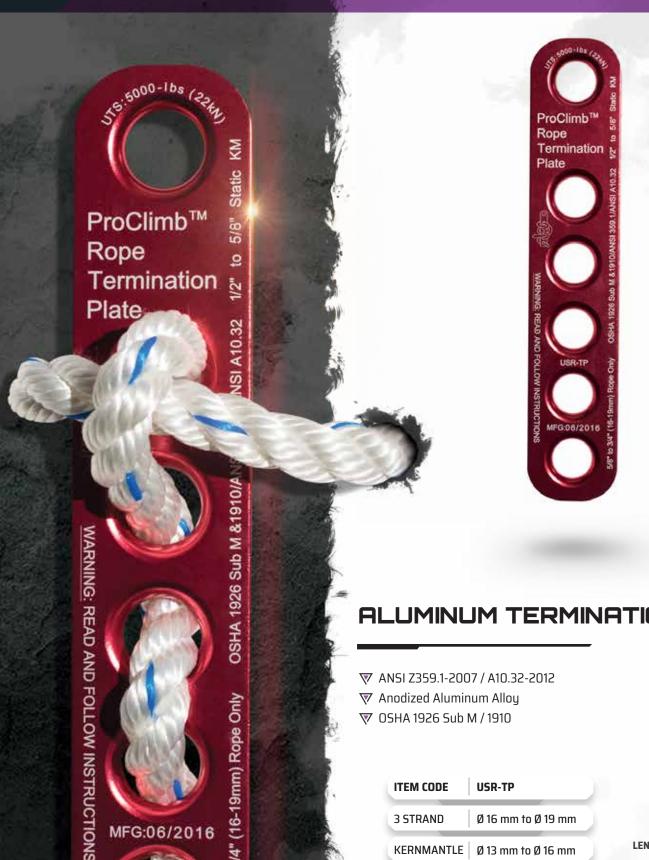

MFG:06/2016

#### DELUXE ALUMINUM UNI-BODY FIDDLE BLOCK ROPE SET

♥ Optional 50 ft. of 1/2" Ø Double Braid Rope

▼ 4:1 Mechanical Advantage

ITEM CODE	USR-FB-DLX(R-AP)
SHEAVE	Ø 2-5/8"
SHACKLE	5/16"
WLL	1,000 lb



#### 5-IN-1 HAULER KIT

▼ 75 ft. of 1/2" Ø Low-Stretch Load Pro™ Rope

▼ Progressive Capture with Bulldog Prusik

▼ 5:1 Mechanical Advantage

▼ 2 Steel Carabiners

ITEM CODE	USR-HAULER-75AP
SHEAVE	Ø 2"
WLL	1,000 lb



#### **ALUMINUM TERMINATION PLATE**

- ▼ ANSI Z359.1-2007 / A10.32-2012
- ▼ Anodized Aluminum Alloy
- ▼ OSHA 1926 Sub M / 1910

ITEM CODE	USR-TP
3 STRAND	Ø 16 mm to Ø 19 mm
KERNMANTLE	Ø 13 mm to Ø 16 mm
UTS	22 kN
WT.	8.8 oz

LENGTH	WIDTH	HOLE Ø
257.3 mm	50.8 mm	21.8 mm

#### STAINLESS STEEL FIDDLE BLOCK ROPE SET

♥ Optional 50 ft. of 1/2" Ø Double Braid Rope

ITEM CODE	USR-FB-STD(R)	
SHEAVE	Ø 2-5/8"	
SHACKLE	3/16"	
WLL	1,000 lb	



1.866.490.7444 www.usrigging.com

# TREE CARE

All Tree-Guy™ systems install in less than half the time of conventional tree-staking devices; saving you time and labor cost.

Tree-Guy™ anchoring systems require little to no upkeep - install and forget. Minimal, if any, maintenance is required. If guy length adjustment is ever necessary, it can be done by one man in seconds, and without tools.

- U.S. RIGGING SUPPLY

#### TG-1

TREE-GUY

TREE-GUY

TREE-GUY

A complete tree support system. This gear includes:

- ▼ 13' Long Vinyl Coated Cable
- Patented Arrow Anchor
- ▼ Limit Springs
- Tree Collar
- ▼ Tensioner

Three complete assemblies in each kit.

#### TG-3G

A tree anchoring support system. This gear includes:

- ▼ 12' Long Tree-Tie Webbing
- Patented Arrow Anchor

Three complete assemblies in each kit.

# TREE-GUY

#### **TG-2**

A tree anchoring support system. This gear

- ▼ 13' Long Vinul Coated Cable
- Patented Arrow Anchor
- ▼ Tree Collar

TG-4B-G

▼ Tensioner

Three complete assemblies in each kit.

#### TREE-GUY



buckle. This gear includes:

▼ 12' Long Tree-Tie Webbing

A tree anchoring support system with cam

- ▼ Patented Arrow Anchor
- ▼ Cam-Lock Adjuster

Three complete assemblies in each kit.

#### TG-5

A tree anchoring support system. This gear includes:

- ▼ 30" Long Wire Cable
- Patented Arrow Anchor
- ▼ Thimble Eye

Ten complete assemblies in each kit.

# TREE-GUY



TG-6

Patented Arrow Anchor

A tree anchoring support system. This gear

▼ Thimble Eye

Ten complete assemblies in each kit.

#### **ARROW ANCHOR**

The Patented Arrow Anchor, Black

### TREE-GUY




#### TREE-TIE WEBBING

The Tree-Guy™ Tree-Tie is an eco-friendly, non-stretch webbing that's mildew resistant.

Available in 150', 250', 500', & 1,500' lengths.

SKU	TA-WEB
WIDTH	3/4" Webbing
TS	900 lb
COLOR	Olive or White



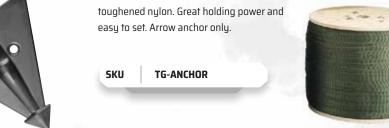



316 stainless steels, our quick links, thimbles, and shackles deliver quality and durability while providing an unbeatable industry leading value.

- U.S. RIGGING SUPPLY

#### 316 SS QUICK LINKS

DURABRITE

\*WLL allows a 5:1 design factor.



#### 304 SS DELTA QUICK LINKS



\*WLL allows a 5:1 design factor.



SKU	SIZE	LENGTH	WIDTH	OPEN Ø	WLL*
LS-QL-04	1/8"	1-7/16"	11/16"	3/16"	485 lb
LS-QL-06	3/16"	1-15/16"	15/16"	1/4"	990 lb
LS-QL-08	1/4"	2-1/4"	1-1/16"	5/16"	1,430 lb
LS-QL-10	5/16"	2-15/16"	1-5/16"	3/8"	2,240 lb
LS-QL-12	3/8"	3-1/2"	1-9/16"	1/2"	3,960 lb

SKU	SIZE	LENGTH	WIDTH	OPEN Ø	WLL*
LS-DL-06	3/16"	1-7/8"	1-9/16"	1/4"	710 lb
LS-DL-08	1/4"	2-3/16"	1-7/8"	5/16"	990 lb
LS-DL-10	5/16"	2-7/8"	2-3/16"	3/8"	1,690 lb
LS-DL-12	3/8"	3-7/16"	2-5/8"	1/2"	2,750 lb

#### SS QUICK LINKS





#### HEAVY-DUTY SS DELTA LINKS







SKU	SIZE	LENGTH	WIDTH	OPEN Ø
KNG-600-05	5 mm	50 mm	26 mm	7 mm
KNG-600-06	6 mm	58 mm	29 mm	8 mm
KNG-600-08	8 mm	74 mm	39 mm	10 mm
KNG-600-10	10 mm	89 mm	47 mm	11 mm
KNG-600-12	12 mm	105 mm	52 mm	14 mm

SKU	SIZE	LENGTH	WIDTH	OPEN Ø
KNG-602-08	8 mm	72 mm	56 mm	8 mm
KNG-602-10	10 mm	86 mm	66 mm	10 mm

#### ZINC-PLATED QUICK LINKS



\*WLL allows a 5:1 design factor.



#### ZINC-PLATED DELTA LINKS



\*WLL allows a 5:1 design factor.



SKU	SIZE	LENGTH	WIDTH	OPEN Ø	WLL*
LC-QL-06Z	3/16"	1-15/16"	15/16"	1/4"	610 lb
LC-QL-08Z	1/4"	2-1/4"	1-1/16"	5/16"	880 lb
LC-QL-10Z	5/16"	2-15/16"	1-5/16"	3/8"	1,540 lb
LC-QL-12Z	3/8"	3-1/2"	1-9/16"	1/2"	2,420 lb

SKU	SIZE	LENGTH	WIDTH	OPEN Ø	WLL*
LC-DL-06Z	3/16"	1-7/8"	1-9/16"	1/4"	330 lb
LC-DL-08Z	1/4"	2-3/16"	1-7/8"	5/16"	550 lb
LC-DL-10Z	5/16"	2-7/8"	2-3/16"	3/8"	1,190 lb
LC-DL-12Z	3/8"	3-7/16"	2-5/8"	1/2"	1,980 lb

89

#### TEARDROP FIBER ROPE THIMBLE W/ EARS



▼ Nylon

\*WLL allows a 5:1 design factor.

SKU THIM-16-NYE **SIZE** 7/16" - 1/2" OUTSIDE L 3.00" OUTSIDE W **INSIDE L** 2.35"



#### ROUND FIBER ROPE THIMBLE







SKU	SIZE	MATERIAL	COLOR
THIM-58-LAN	5/8"	Polyethylene	Black
THIM-20-NY	5/8"	Nylon	Blue

#### TEARDROP FIBER ROPE THIMBLE



▼ Nylon



#### 316 SS TWISTED SHACKLE



\*WLL allows a 5:1 design factor.

#### HIGH-WALL FIBER ROPE THIMBLE




Polyethylene

C EN353 EN354 EN355

SKU	THIM-16-LAN
SIZE	7/16" - 1/2"
COLOR	Black or White



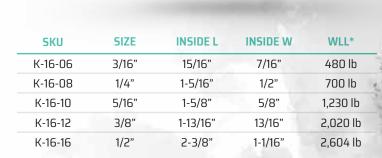





A leader in arborist supplies, Pelican Rope is an expert on all things tree gear and arboriculture. From chafe guards to rope bags, we have you covered. Pelican has an array of extras and addons suited for novice and expert tree climbers alike.

- THE PELICAN ROPE TEAM

# TUBULAR CHAFE GEAR Family Code: CHF-TUB

Our most popular chafe protection, Chafe Master™ tubular chafe gear is very flexible which helps your rope to last longer and be replaced less frequently. Your hands and fingers will also appreciate the protection from cuts and scrapes!

SKU	FLAT WIDTH	INSIDE Ø	SKU	FLAT WIDTH	INSIDE Ø	
CHF-TUB-67	1.18"	0.67"	CHF-TUB-1.57	2.60"	1.57"	
CHF-TUB-79	1.22"	0.79"	CHF-TUB-1.85	3.03"	1.85"	
CHF-TUB-91	1.54"	0.91"	CHF-TUB-2.36	3.82"	2.36"	
CHF-TUB-98	1.65"	0.98"	CHF-TUB-2.62	4.18"	2.62"	
CHF-TUB-1.06	1.77"	1.06"	CHF-TUB-2.87	4.65"	2.87"	
CHF-TUB-1.22	2.05"	1.22"	CHF-TUB-3.66	5.87"	3.66"	
CHF-TUB-1.42	2.24"	1.42"				

Available in 300°



# REMOVABLE CHAFE GUARD

Family Code: CHF-REM

Protect your lines from wear-point abrasion like only Chafe Master's™ removable chafe gear can! It is made of Mil-Spec 1050 ballistic nylon & can be easily removed and installed. This removable chafe gear is extremely durable and is the most popular choice for mooring lines & towing.

SKU	OUTSIDE Ø	CIRCUMFERENCE	FLAT WIDTH
CHF-REM-1.0	1.00"	3.14"	3.89"
CHF-REM-1.25	1.25"	3.92"	4.67"
CHF-REM-2.0	2.00"	6.28"	7.78"

Available in 150'



# REMOVABLE EXTREME Family Code: CHF-EXT

For the most severe abrasion, Chafe Master™ Removable Extreme chafe gear is the right fit for the toughest jobs. Engineered to provide maximum protection, this non-wicking, heavy-duty sleeve is the best choice for tough outdoor

SKU	OUTSIDE Ø	CIRCUMFERENCE	FLAT WIDTH
CHF-EXT-1.75	1.80"	5.50"	7.00"
CHF-EXT-2.0	2.00"	6.28"	7.78"
CHF-EXT-2.38	2.40"	7.47"	8.97"

. Available in 150'



Pelican Rope

#### ROPE COUNTER

- Feet/Inches or Metric Meters Available
- Accurate Reading Without Slipping
- ▼ Adjustable Tension Spring Setting



ROPE SIZE | 3/16" to 1"

WT. | 6.6 lb



93

#### ROPE CUTTER

- ▼ Cuts & Heat Seals at the Same Time
- ▼ Heats up to 1200° Fahrenheit
- ▼ Lit ON/OFF Rocker Switch
- ▼ 2-5/16" Blade Included

ITEM CODE	ROPE*CUTTR
POWER	120 volts - 48 watts
WT.	2.3 lb

#### ROPE BAG

PELICAN RO

- ▼ Carry Up to 200 Feet of Rope
- ▼ 900D Denier Construction
- ▼ Dual-Sided Water Pockets

ITEM CODE	RB-12x18-BLACK
LENGTH	8.3"
WIDTH	10.8"
HEIGHT	20.0"
WT.	2.0 lb



# SHRINK TUBING

- ▼ 2:1 Shrink Ratio for Non-Adhesive
- ▼ 3:1 Shrink Ratio for Adhesive
- ▼ Water, Oil & Acid Resistant
- Abrasion Resistant

92

SKU	Ø	COLOR	ADHESIVE
F-09-24BLK	3/4"	Black	
F-09-24CLR	3/4"	Clear	
F-09-24CLRA	3/4"	Clear	₹
F-09-32BLK	1"	Black	
F-09-32BLKA	1"	Black	₹
F-09-32CLR	1"	Clear	
F-09-32CLRA	1"	Clear	♥
F-09-40CLRA	1-1/4"	Clear	₹
F-09-48CLRA	1-1/2"	Clear	₩

www.pelicanrope.com

1.866.490.7444

# PRODUCT INDEX

	\ <b>0</b>		KNG-733-A1	Guide Carabiner
	( H /		KNG 755 AT	Mini D Carabiner
\7PE2	The Brainiac™ Whoopie Sling	58	KNG-761-120B	Frog Express
17PE2	The Maniac™ Loopie Sling	59	KNG-778-A1	Ferrata Carabiner
AAST-160	Split Tail w/ Eye	53	KNG-778-G1	Ferrata Express Carabiner
ADE	Arborist Dead Eye Sling	55 55	KNG-778-SN	Ferrata Carabiner
ADE AFL	Polyester Lanyard	43	KNG-778-5N KNG-786-A1	HMS Pear Carabiner
APADE2	Adjustable Rigging Block Sling	56	KNG-786-SN	HMS Pear Carabiner
APADE2	Adjustable Rigging Sling	56	KNG-802	Back-Up Fall Arrester w/ Carabiner
APADE2	Adjustable Rigging Ring Sling	57	KNG-805-03	Aluminum Classic 8 Descender
APADE2	Adjustable Dual-Head Ring Sling	57	KNG-810-08	Fast-Inox Retainer Clip
APDE2	Dead Eye Tree Sling	55	KNG-810-1	Fast-Rubber Rope Fastener
\ST-160	Arborist Split Tail	53	KNG-810-12	Fast-Inox Retainer Clip
			KNG-813	Fast-Nylon Rope Fastener
	\ \ \ \		KNG-839	Alby Tree Rigging Block
HF-EXT	Removable Extreme Chafe Gear	91	KNG-874-03	Trender Aluminum Double Ascender
HF-REM	Removable Extreme Chare Gear		KNG-876-00D	Futura Hand Ascender
		91	KNG-876-005	Futura Hand Ascender
HF-TUB	Tubular Chafe Gear	91	KNG-888	Duck Multi-Use Belay Device
			KNG-896-D	Lift Ascender
			KNG-896-5	Lift Ascender
)BF-2004-1	Forged Steel Rigging Ring	79	KNG-901	Paddle Carabiner
	3 33 3 3		KNG-911-A1	XL Aluminum Rescue Carabiner
	\ F /		KNG-911-5N	XL Aluminum Rescue Carabiner
-09	Shrink Tubing	92		
L	Wire Core Flip Line	38	1500	L
LK	All-in-One Flip Line Kit	38	LC-DL	Zinc Plated Delta Quick Links
LK3	Better Grab Flip Line Kit	39	LC-QL	Zinc Plated Quick Links
LK33	Removable Better Grab Flip Line Kit	39	LS-DL	304 Stainless Steel Delta Quick Links
R-METER	Rope Counter	93	LS-QL	316 Stainless Steel Quick Links
			LY3KM-201C	Utili-Tree™ Flip Line
	XK/		LYAB-16	Buckstrap Positioning Lanyard
			LYAR-1605	Better Grab Arborist Positioning Lanyard
(-16	316 Stainless Steel Twisted Shackle	88	LYB	Beranek Lanyard
(AA-60-08	Tool Accessory Carabiner	77	LYB	Chainsaw Lanyard
NG-265	Paddle Carabiner	77	LYB/LYT	Adjustable Rope Lanyard
NG-411-L1	XL Carbon Steel Carabiner	73	LYFS	Friction Saver
NG-411-0Z	XL Steel Carabiner	73	LYKKM-141	E-Z Move™ Positioning Lanyard
NG-411-SN	XL Carbon Steel Carabiner	73	LYKM-162	Better Grab Tower Positioning Lanyard
NG-411-TZ	XL Steel Carabiner	72	LYKM-162P	2-in-1 Prusik Positioning Lanyard
NG-412-L1	Ovalone Carbon Steel Carabiner	73	LYSE	The Bulldog™ Technora® Prusik Lanyard
(NG-412-OZ	Ovalone Carabiner	73	LYSE	Technora® Prusik Lanyard
(NG-412-TZ	Ovalone Carabiner	73		
(NG-462-C1	Classic Oval Steel Carabiner	73	LYT	2-in-1 Lanyard
NG-511-L3	XL Inox Rescue Steel Carabiner	73	LYTPD	Adjustable Positioning Lanyard
(NG-511-SN	XL Inox Steel Carabiner	73	LYTPD	Restraint & Positioning Lanyard
NG-567-10	Cross Bar Carabiner	72		NI Z
(NG-600	Stainless Steel Quick Links	87		N
(NG-602	Heavy-Duty Stainless Steel Delta Quick Links	87	NY	3 Strand Nylon
NG-700-200		78		5 Strana region
	Frog Cable			\P/
NG-710	Oval Aluminum Carabiner	77		
(NG-712-5N	Ovalone Aluminum Carabiner	77	PD	Rig Master™
NG-713	Guide Carabiner	77	PE	3 Strand Polyester
NG-715-BLK	Tango Safety Snaphook w/ Fixed-Eye	69	1 -	3 Silaliu Pulyesiei

			USR-28-S	Stainless Steel Rigging Ring
	\R/		USR-40-A	Red Baron Snaphook w/ Fixed-Eye
RB-12X18	Rope Bag	93	USR-46-S	Stainless Steel Rigging Ring
ROPE*CUTTR	Rope Cutter	93	USR-50-AB/ABK/AR	Aluminum Snaphook w/ Fixed-Eye
	Y-Carlotte - Carlotte		USR-58-AB	Forged Aluminum Snaphook w/ Fixed-Eye
	T		USR-59-AY	Forged Aluminum Snaphook
			USR-67	Mod. D Carabiner w/ Captive Pin
TA-WEB	Tree-Tie Webbing	85	USR-71-C09A	Steel Ladder Hook w/ Captive Pin
ΓG-1	Complete Tree Anchoring Support System	85	USR-71-C09B	Steel Ladder Hook w/ Captive Pin
ГG-2	Tree Anchoring Support System	85	USR-71-CTL	Fire Fighter Hook w/ Captive Pin
rg-3g	Tree Anchoring Support System	85	USR-71-CTS	Steel Ladder Hook w/ Captive Pin
rg-4B-G	Tree Anchoring System Kit w/ Cam Buckle	85	USR-71N-CO9A	Steel Ladder Hook w/ Captive Pin
rG-5	Tree Anchoring Support System	85	USR-835-AU	Aluminum Figure 8 Descender
rG-6	Tree Anchoring Support System	85	USR-840-AU	Big 8 Aluminum Descender w/ Ears
G-ARROW	Arrow Anchor	85	USR-850-S	Big 8 Stainless Steel Descender w/ Ears
THIM-16-LAN	Polyethylene High-Wall Fiber Rope Thimble	88	USR-98-C09A	Large D Steel Carabiner
THIM-16-NY	Nylon Teardrop Fiber Rope Thimble	88	USR-98-C095	Large D Steel Carabiner
HIM-16-NYE	Nylon Teardrop Fiber Rope Thimble w/ Ears	88	USR-98-C09T	Large D Steel Carabiner
THIM-58-LAN	Polyethylene Round Fiber Rope Thimble	88	USR-DSL-A	Forged Aluminum Eye-To-Eye Swivel
			USR-DSL-AN	Rescue Swivel
ANA PR	\ U /		USR-DSR	Aluminum Eye-To-Eye Swivel
JSR-01-CF07	Steel Snaphook w/ Fixed-Eye	68	USR-FB-DLX	Deluxe Aluminum Uni-Body Fiddle Block Set
JSR-01-CF07 JSR-01-CF09	No. No. 12 Carlot	68	USR-FB-DLXR-AP	Deluxe Aluminum Uni-Body Fiddle Block Rope Set
JSR-UI-CFU9 JSR-01-CF09B	Forged Steel Snaphook w/ Fixed-Eye Steel Snaphook	68	USR-FB-STD	Stainless Steel Fiddle Block Set
THE PARTY OF THE P	1 / 7 / Lace 1960 / Lace		USR-FB-STDR	Stainless Steel Fiddle Block Rope Set
ISR-01-CFE	Steel Safety Snaphook	68	USR-HAULER-75AP	5-In-1 Hauler Kit
ISR-01-CFE9	Forged Steel Safety Snaphook	68	USR-MRG-200	Aluminum Mini Rope Grab
ISR-02-CS07	Forged Steel Swivel Snaphook	68	USR-MRG-333	Better Grab Removable Rope Grab
JSR-02-CS09B	Forged Steel Swivel Snaphook	68	USR-P16	Micro Pulley
JSR-02-CSE	Forged Steel Swivel Snaphook	68	USR-PFB-AU	Fixed-Side Mini Pulley
JSR-04-C09A	Steel Ladder Hook w/ Captive Pin	71	USR-PMS-AU	Aluminum Swing Pulley
JSR-04-C09B	Forged Scaffold Ladder Hook w/ Captive Pin	71	USR-PSW-AU	Extra Roll Aluminum Pulley
ISR-107-A3TU	Aluminum Big D Carabiner	75	USR-PTW-AU	Aluminum Swing-Side Pulley
JSR-109	Micro 900 Carabiner	76	USR-TP	Aluminum Termination Plate
ISR-117-ATL	Modified D Aluminum Carabiner	76	OSIN 11	Adminian remination fale
JSR-121-ABUU	HMS Aluminum Carabiner	76		\#/
JSR-125-A3TU	Forged HMS Carabiner	75		(#)
JSR-127-A3TU	True Oval Aluminum Carabiner	74	1AP	Load Pro™
JSR-127-AU	True Oval Aluminum Carabiner	75 	1AP	The Ape™
ISR-128-A3TU	Copper Head Carabiner	75	15	Accessory Cord
JSR-12-ATL	HMS Aluminum Carabiner	76	1S-T	Technora® Prusik Line
JSR-12-CTL	Klettersteig Steel Carabiner	71	1WPP	Static Master Pro™
JSR-12-CTLD	Equal D Steel Carabiner	71	2KK	Fireshield-K™
JSR-12-CTLM	Modified D Steel Carabiner	71	2TT / 2TP	Fireshield-T™
JSR-12D-ATLY	Aluminum Alloy Carabiner	76	2WD	Canyon Light™
JSR-12M-A3TU	Forged Modified D Aluminum Carabiner	75	2WD	Rescue Light™
JSR-140-A3TU	Aluminum Carabiner w/ Fixed-Eye	75	2WP	Static Master™
JSR-145-ABKU	Aluminum Snaphook w/ Fixed-Eye	69	2WP2	Static Master II™
	Forged Aluminum Swivel Snaphook	69	2WP24	Escape Pro™
JSR-14-A9Y	Aluminum Carabiner w/ Fixed-Eye	76	4A-15LY15	Tree Viper™
JSR-14-A9Y JSR-14-ATL	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner	76	4A-15LY15 4AR-14Y	Tree Viper™ Arborist-24™
JSR-14-A9Y JSR-14-ATL JSR-14-ATL9	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner Forged Aluminum Carabiner w/ Fixed-Eye	76 76		•
ISR-14-A9Y ISR-14-ATL ISR-14-ATL9 ISR-14-C3T	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner Forged Aluminum Carabiner w/ Fixed-Eye Forged Steel Carabiner	76 76 71	4AR-14Y	Arborist-24™
JSR-14-A9Y JSR-14-ATL JSR-14-ATL9 JSR-14-C3T JSR-14-C9Y	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner Forged Aluminum Carabiner w/ Fixed-Eye Forged Steel Carabiner Fixed-Eye Steel Carabiner	76 76 71 71	4AR-14Y 4AR-16	Arborist-24™ Arborist-16™
JSR-14-A9Y JSR-14-ATL JSR-14-ATL9 JSR-14-C3T JSR-14-C9Y JSR-19-A3T	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner Forged Aluminum Carabiner w/ Fixed-Eye Forged Steel Carabiner Fixed-Eye Steel Carabiner I-Beamer Carabiner	76 76 71 71 74	4AR-14Y 4AR-16 4BR	Arborist-24™ Arborist-16™ Matador™ Bull Rope
JSR-14-A9Y JSR-14-ATL JSR-14-ATL9 JSR-14-C3T JSR-14-C9Y JSR-19-A3T JSR-19-A3T9	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner Forged Aluminum Carabiner w/ Fixed-Eye Forged Steel Carabiner Fixed-Eye Steel Carabiner I-Beamer Carabiner I-Beamer Carabiner	76 76 71 71 74 74	4AR-14Y 4AR-16 4BR 4N	Arborist-24™ Arborist-16™ Matador™ Bull Rope Composite Load Pro™
JSR-1455-ABK JSR-14-A9Y JSR-14-ATL JSR-14-ATL9 JSR-14-C3T JSR-14-C9Y JSR-19-A3T JSR-19-A3T9 JSR-19-A3T9	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner Forged Aluminum Carabiner w/ Fixed-Eye Forged Steel Carabiner Fixed-Eye Steel Carabiner I-Beamer Carabiner I-Beamer Carabiner	76 76 71 71 74 74	4AR-14Y 4AR-16 4BR 4N 7D	Arborist-24™ Arborist-16™ Matador™ Bull Rope Composite Load Pro™ D-12™
JSR-14-A9Y JSR-14-ATL JSR-14-ATL9 JSR-14-C3T JSR-14-C9Y JSR-19-A3T JSR-19-A3T9	Aluminum Carabiner w/ Fixed-Eye Modified D Rescue Carabiner Forged Aluminum Carabiner w/ Fixed-Eye Forged Steel Carabiner Fixed-Eye Steel Carabiner I-Beamer Carabiner I-Beamer Carabiner	76 76 71 71 74 74	4AR-14Y 4AR-16 4BR 4N 7D 7PE	Arborist-24 <sup>™</sup> Arborist-16 <sup>™</sup> Matador <sup>™</sup> Bull Rope Composite Load Pro <sup>™</sup> D-12 <sup>™</sup> P-12 <sup>™</sup>

www.pelicanrope.com 1.866.490.7444





www.pelicanrope.com



www.usrigging.com

REGISTERED TRADEMARK NOTICES:

ANSI® is a registered trademark of the American National Standards Institute.

Dyneema® is a registered trademark of Royal DSM N.V.

DuraBrite® is a registered trademark of U.S. Rigging Supply Inc.

Kevlar® and Kevlar AP® are registered trademarks of E.I. du Pont de Nemours and Company.

NFPA® is a registered trademark of the National Fire Protection Association.

OSHA® is a registered trademark of the Occupational Safety and Health Administration.

ProClimb® is a registered trademark of U.S. Rigging Supply Inc.

Spectra® is a registered trademark of Honeywell Int'l Inc.

Technora® is a registered trademark of Teijin, Ltd.

UL® and the UL LLC logo are registered trademarks of UL LLC.

Specifications and availability subject to change.











©2021 U.S. Rigging Supply All Rights Reserved